

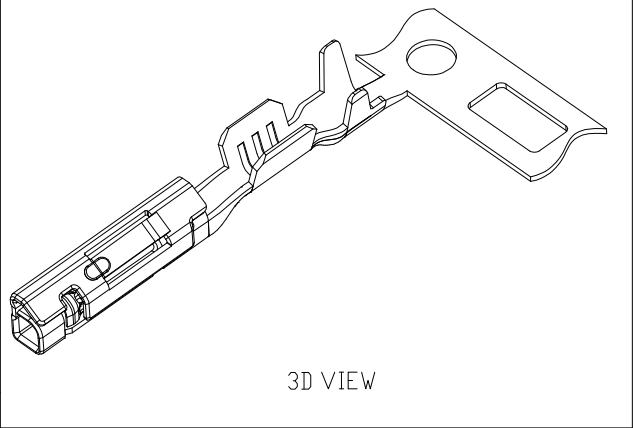

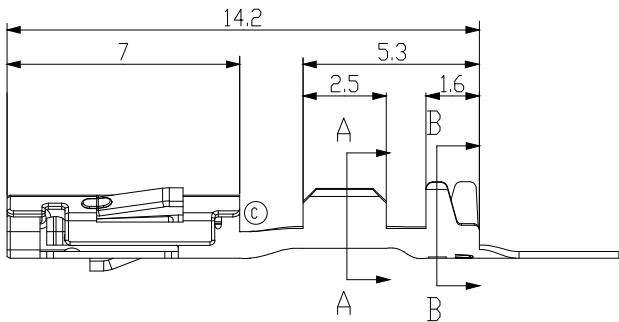



REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	RELEASED(RD-2015-005)	26JAN'15	CH		SJ
B	REVISED(RD-2015-028)	10SEP'15	CH		SJ
C	REVISED(RD-2018-069)	22AUG'18	KH	SH	MJ




3D VIEW

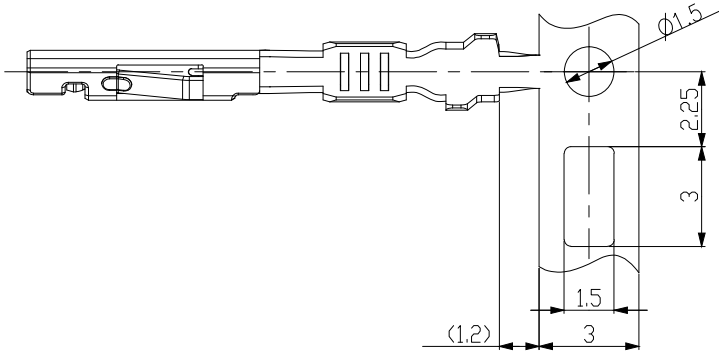

SECTION A-A
SCALE 10:1



SECTION B-B
SCALE 10:1

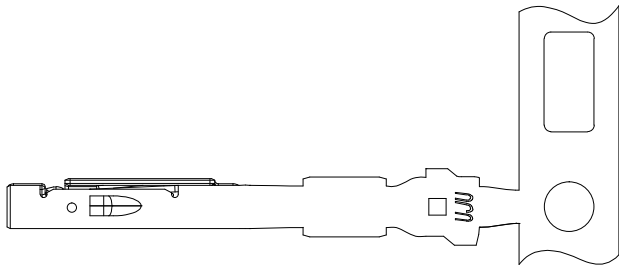

NOTE.
1.GENERAL TOLERANCE:±0.15, ±3°
2.APPLICABLE WIRE RANGE:

Part Number	Conductor		Insulation Diameter	
	Nominal Size (mm)	Outer Diameter (mm)	Standard (mm)	Maximum (mm)
KH1200031-20	0.22	0.55~0.7	1.0~1.1	1.05~1.2
KH1200031-21	0.3~0.5	0.8~1.1	1.2~1.6	1.3~1.7

3.APPLICATOR FEED:7.5

(2.4)	2.4	(1.9)	1.97	PRE-TIN	C64750-H ⑧	0.3 ~ 0.5SQ	025 REC(M)	KH1200031-21
(1.8)	2.4	(1.5)	1.8			0.22SQ	025 REC(S)	KH1200031-20
(D)	C	(B)	A	FINISH	MATERIAL	APPLICABLE WIRE RANGE	DESCRIPTION	PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED	
0	±
0.0	±
0.00	±
0.000	±
0.0000	±
ANGLES	±
PRODUCT SPEC	-

UNIT MM	
THIRD ANGLE PROJECTION	
APPLICATION SPEC	-

DRWN KH.PARK	<주>우주일렉트로닉스 UJU Electronics co.,Ltd.	
CHKD SH.LEE		
APVD M.J.BANG	NAME	
MATERIAL	025 FEMALE TERMINAL	
SEE TABLE FINISH/COLOR	CUSTOMER	
SEE TABLE WEIGHT	DRAWING KH1200031	
LDC	RESTRICTED TO	SIZE
-	-	A3
SCALE	SHEET	REV
5:1	1 OF 1	C