

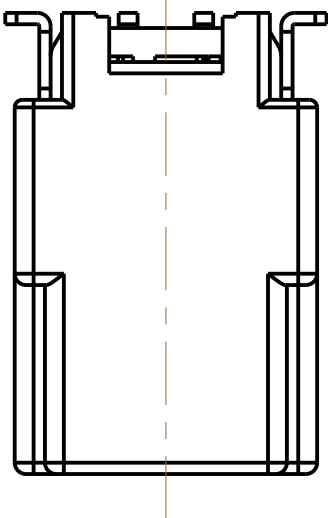



REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
C	REVISED(RD-2016-029)	28.SEP'16	CH	-	SJ
D	REVISED(RD-2018-022)	06.MAR'18	TH	KH	MJ
E	REVISED(RD-2019-049)	2019.03.29	KH	SH	CY

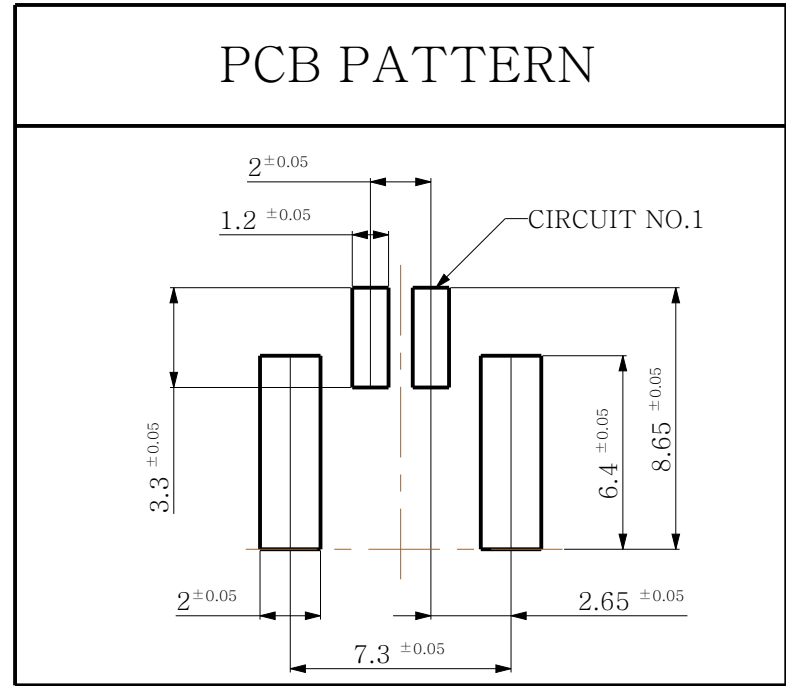





ASSEMBLY WITHOUT COVER

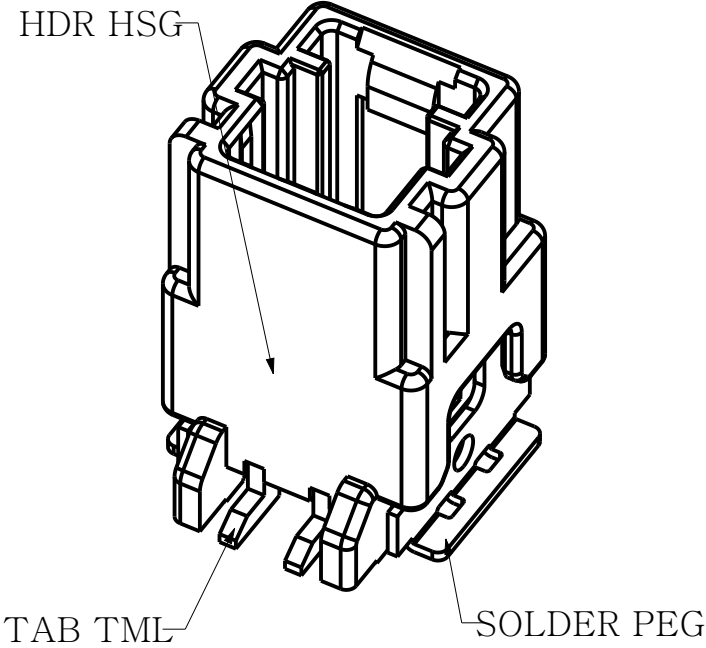

ASSEMBLY WITH COVER

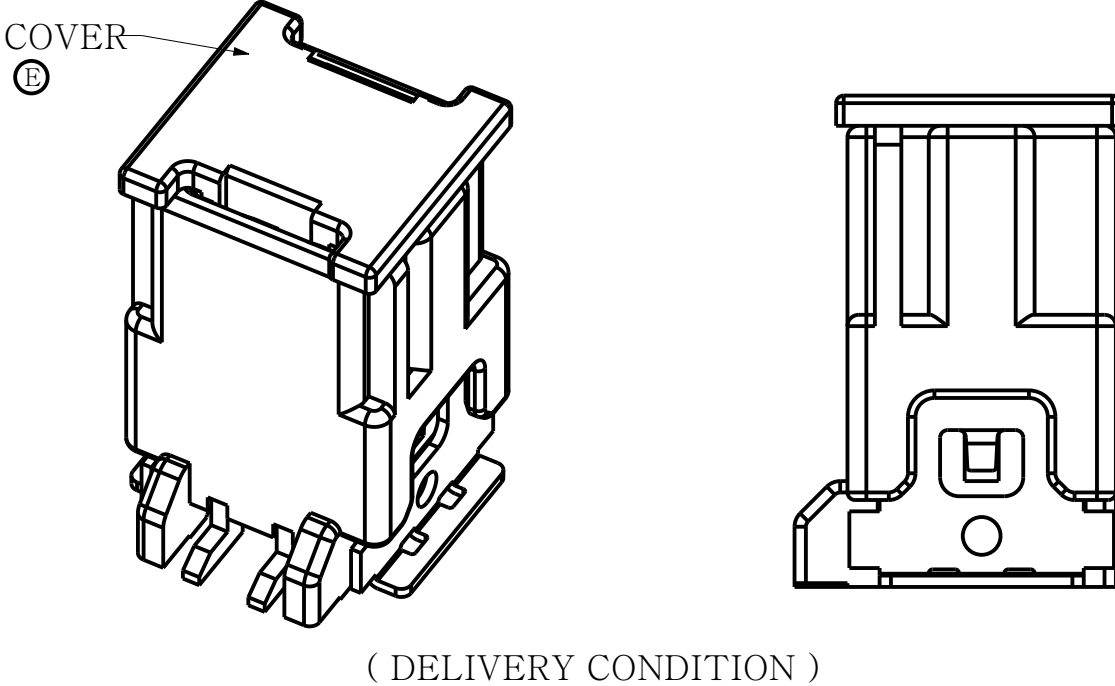

(DELIVERY CONDITION)

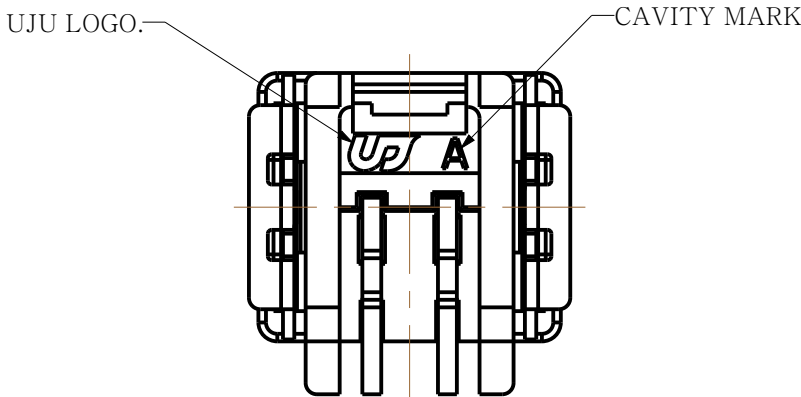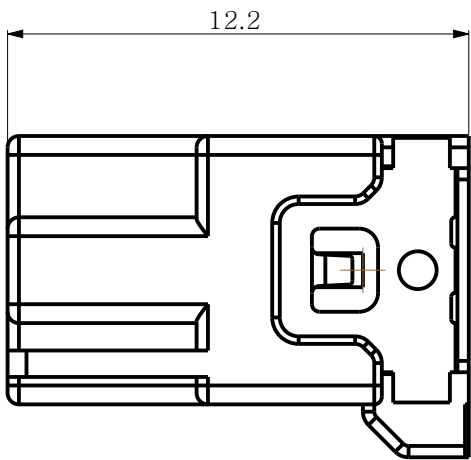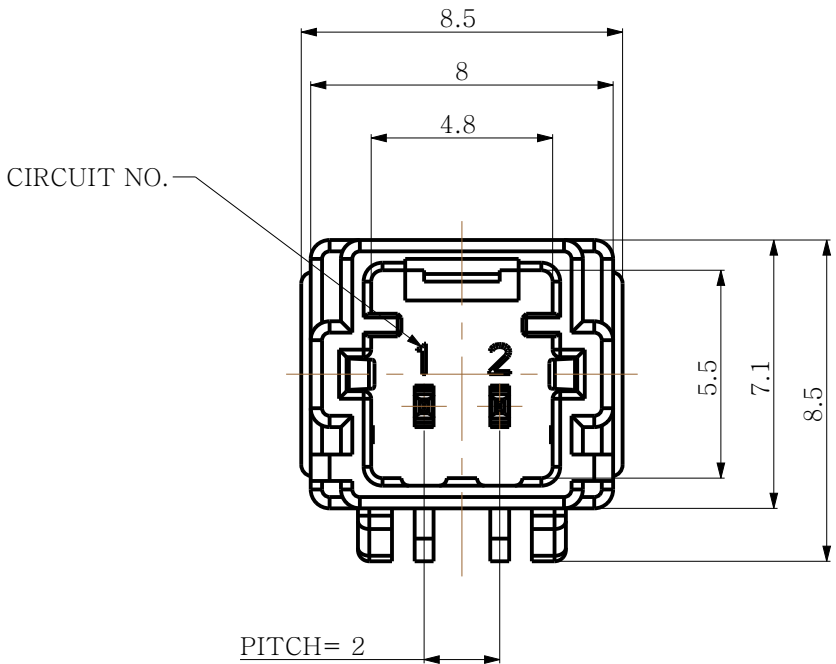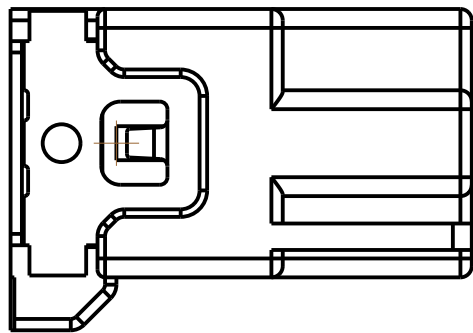

- NOTE.
1. GENERAL TOLERANCE : $\pm 0.3, \pm 3.0^\circ$
 2. HSG DESCRIPTION : SEE TABLE-1
 3. MATERIAL
 - HDR HSG : LCP
 - SOLDER PEG : BRASS, POST-TIN
 - TAB TML : BRASS, POST-TIN
 - COVER : LCP(BLACK)

TABLE-1 ㉔㉔

020 2M SMT HDR ASSY (VTC)	KH1300001-40	2	LCP / BROWN
	KH1300001-20	2	LCP / BLACK
	KH1300001-10	2	LCP / NATURAL
DESCRIPTION	PART NO.	POS	MATERIAL/COLOR

DRWN	TH.LEE	 (주)우주 일렉트로닉스 UJU Electronics co.,Ltd.			
CHKD	KH.PARK				
APVD	MJ.BANG				
NAME		020 2M SMT HDR ASSY (VTC)			
MATERIAL		CUSTOMER		DRAWING NO	
SEE TABLE-1		DRAWING		KH1300001	
FINISH/COLOR		LOC		SIZE	
SEE TABLE-1		RESTRICTED TO		A2	
WEIGHT		SCALE		5:1	
		SHEET		1 OF 1	
		REV		E	

TOLERANCES UNLESS OTHERWISE SPECIFIED	UNIT MM
0 ±	THIRD ANGLE PROJECTION
0.0 ±	
0.00 ±	
0.000 ±	
0.0000 ±	
ANGLES ±	
PRODUCT SPEC	APPLICATION SPEC