
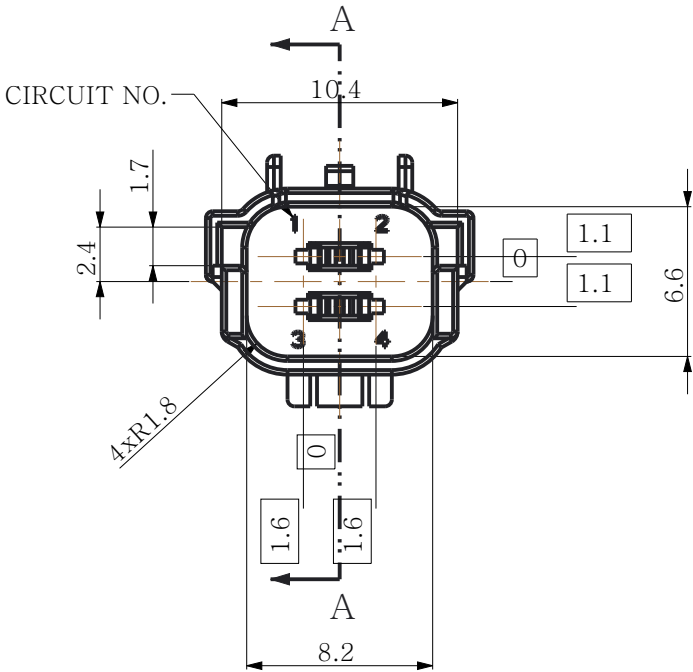
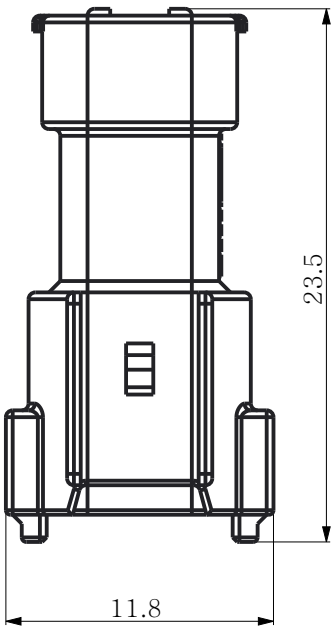
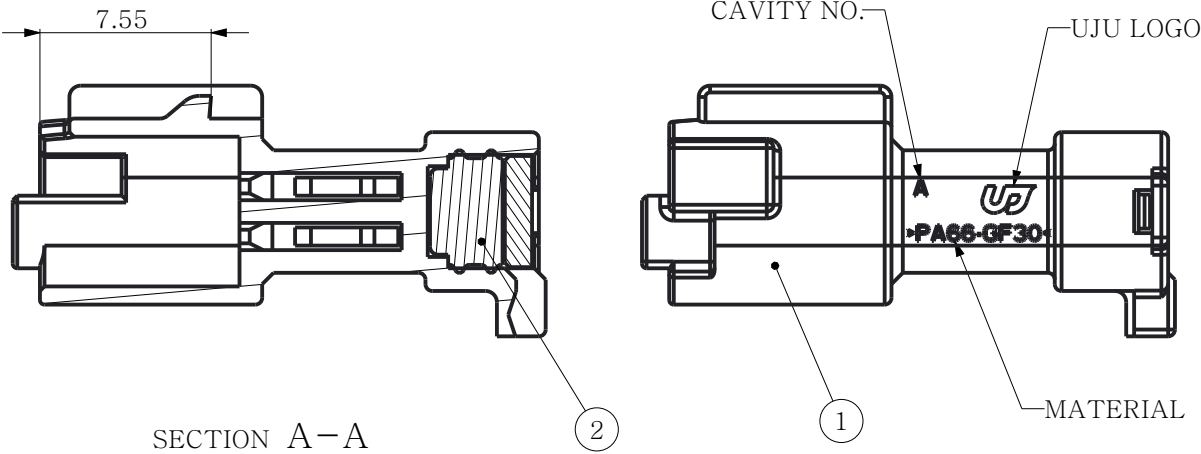
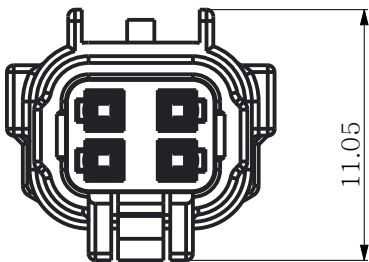


REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	EO NO (RD-2019-179)	18DEC'19	JH	KH	CY

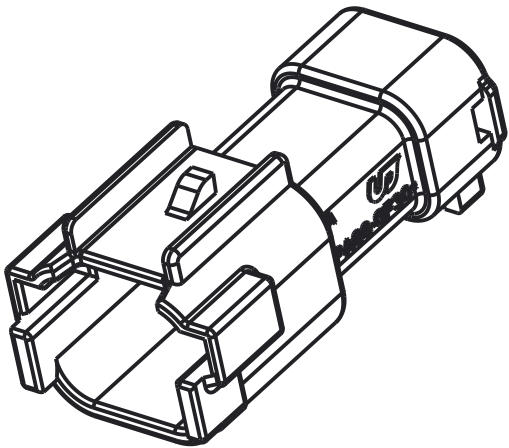

NOTES:

1. GENERAL TOLERANCE: ± 0.3 , $\pm 3^\circ$
2. REFERENCE MATING CONNECTOR IS KH1600061-20
3. SEE THE FOLLOWING CHART FOR ACCEPTABLE TERMINAL AND WIRE
4. LIMIT THE HSG GATE BURR BELOW 0.3mm

UJU TERMINAL	KH1600060-21
WIRE INSULATION O.D	1.2 - 1.5mm (0.3, 0.35mm ²)

TOLERANCES UNLESS OTHERWISE SPECIFIED	
0	±
0.0	±
0.00	±
0.000	±
0.0000	±
ANGLES	±
PRODUCT SPEC	

UNIT MM
THIRD ANGLE PROJECTION
APPLICATION SPEC

2	GREEN	SILICONE	KN0000012	020 4P BLOCK SEAL	1
1	BLACK	PA66-GF15	KM1600064-20	020 SLD 4M HSG	1
NO	COLOR	MATERIAL	PART NO.	DESCRIPTION	Q'TY
DRWN		JH RYU	 (주)우주일렉트로닉스 UJU Electronics co.,Ltd.		
CHKD		KH PARK			
APVD		CY CHOI			
MATERIAL		SEE TABLE	NAME		
FINISH/COLOR		SEE TABLE	020(0.5mm) SEALED 4P MALE ASSEMBLY		
WEIGHT			CUSTOMER	DRAWING NO	
			DRAWING	KH1600063	
LOC	RESTRICTED TO	SIZE	SCALE	SHEET	REV
		A3	3:1	1 OF 1	A