




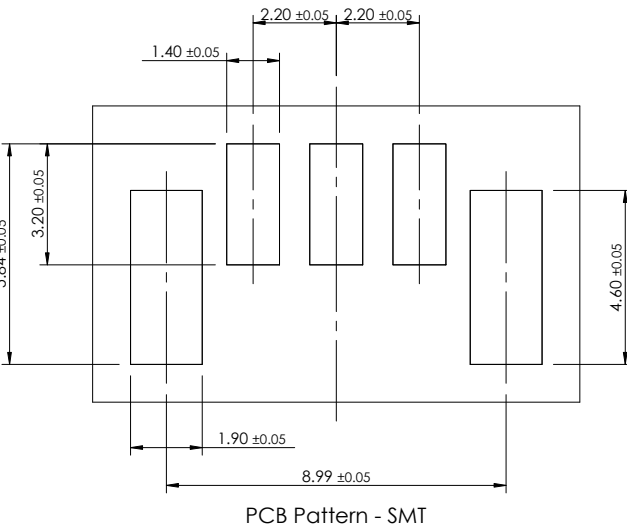






PCB Pattern - SMT

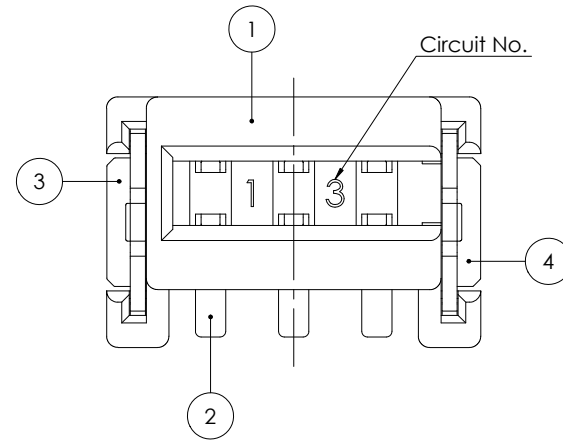


REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	RELEASED	20 MAR '19	JK	SH	CY

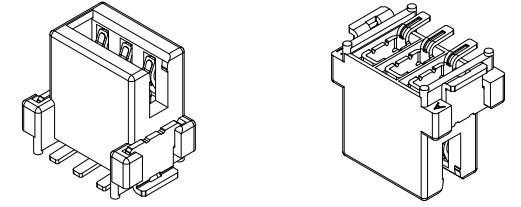


3D View

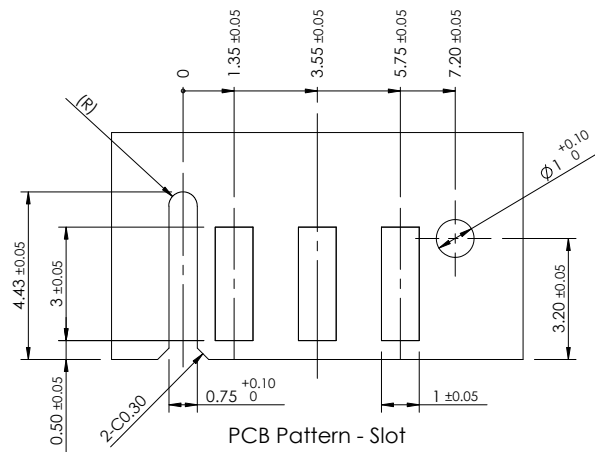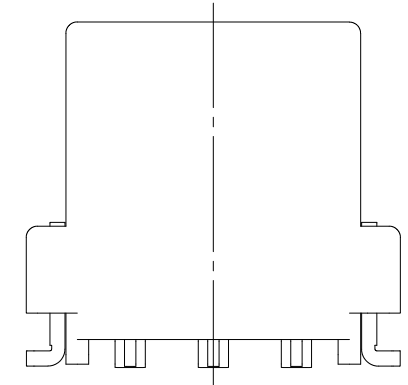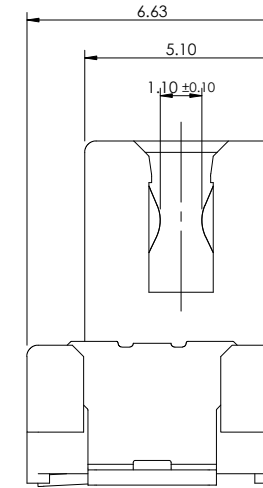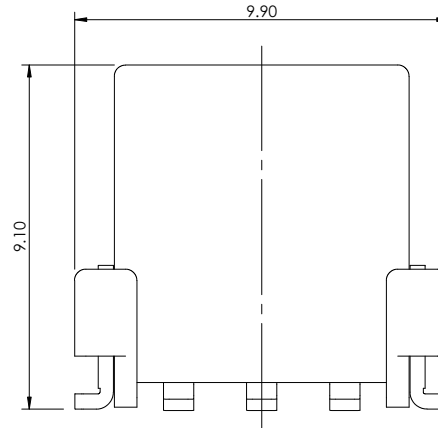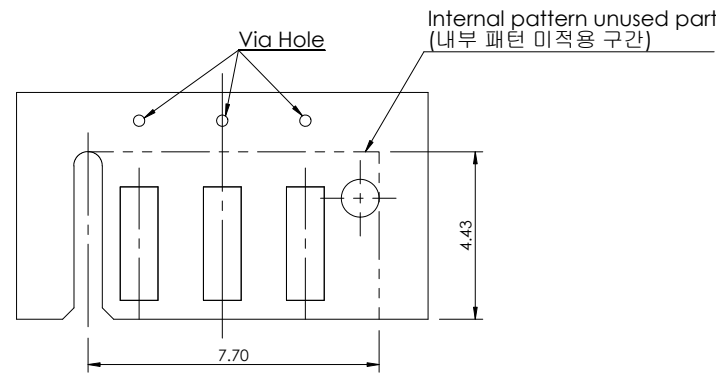

PCB Pattern - Slot



Detail A
Scale 10 : 1

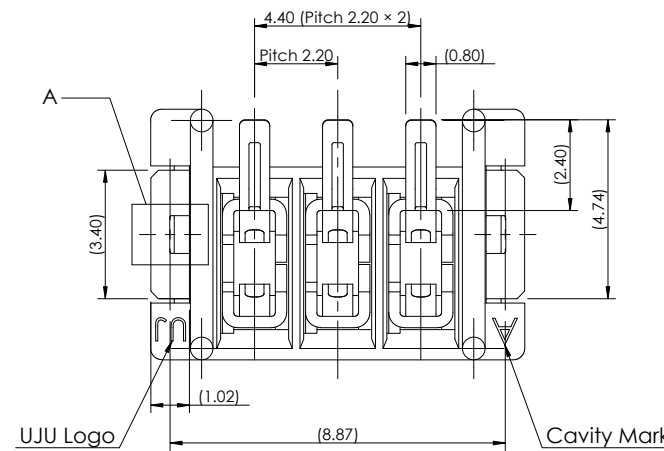

-Note. 1-

1. General Tolerance : ± 0.30
2. Burr side is not permitted.
3. No crack

No.	Description	Material	Finish / Color	Q'ty
4	020 S SMT Solder Peg VTC-R	Copper Alloy	Post-Tin	1
3	020 S SMT Solder Peg VTC-L	Copper Alloy	Post-Tin	1
2	PCB_Slot_SMT_F_V_TML	Copper Alloy	Post-Tin	3
1	PCB_Slot_SMT_3F_V_HSG	PA9T-GF30	Black	1

DRWN JK. HWANG	CHKD SH. LEE	APVD CY. CHOI	MATERIAL SEE TABLE	FINISH/COLOR SEE TABLE	WEIGHT
NAME PCB_Slot_SMT_3F_V_ASSY					
CUSTOMER DRAWING			DRAWING NO KH1700030		
LOC	RESTRICTED TO	SIZE A3	SCALE 5:1	SHEET 1 OF 1	REV A

-Note. 2 (PCB Pattern - Slot)-

1. Thickness : 1.60 ± 0.10
2. Finish : Same as terminal plating
Ex) Sn/HASL $\leftrightarrow$ Sn, Au $\leftrightarrow$ Au
3. Recommendation : Apply a via hole for connect both sides.
4. Concrete specifications are discussed with UJU.