

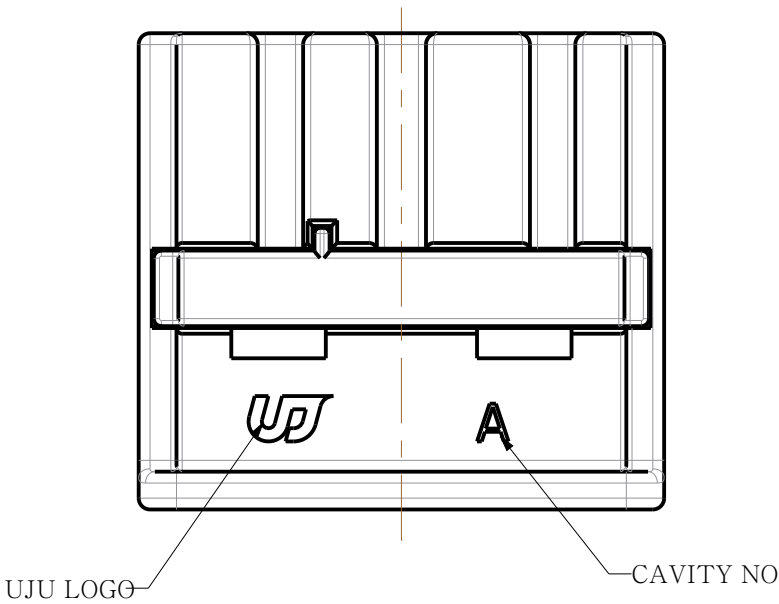
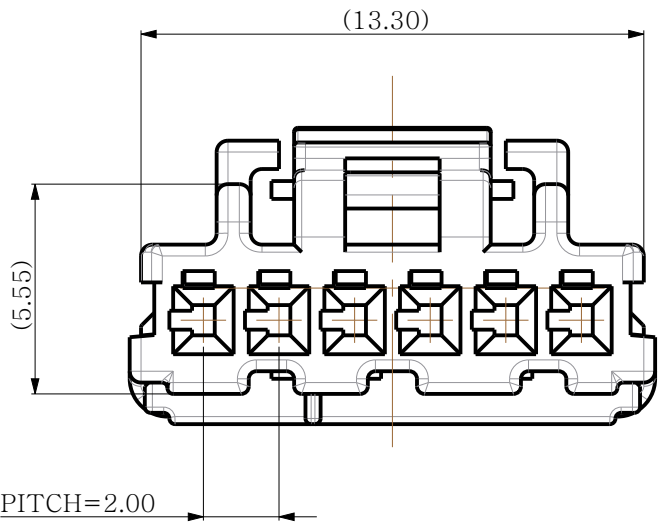
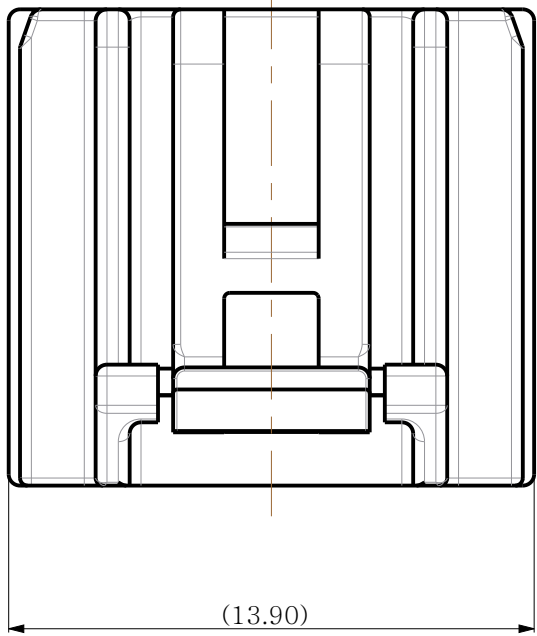




TPA SECONDARY LOCK POSITION

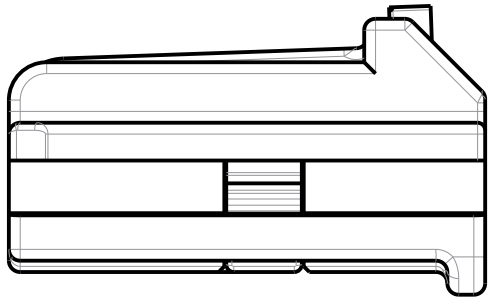


CODE A
(NATURAL)

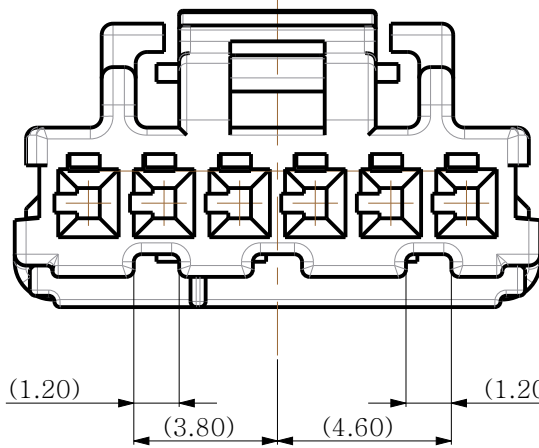

CADE B
(BLACK)

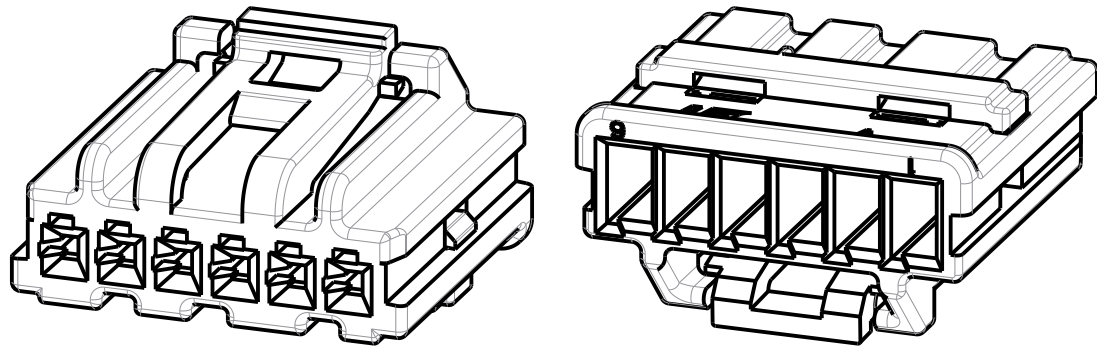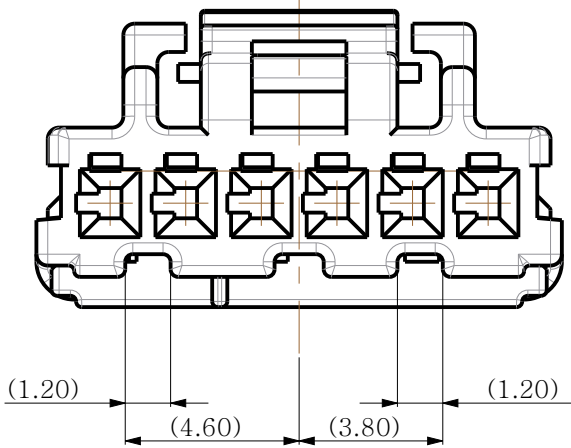

ISO VIEW

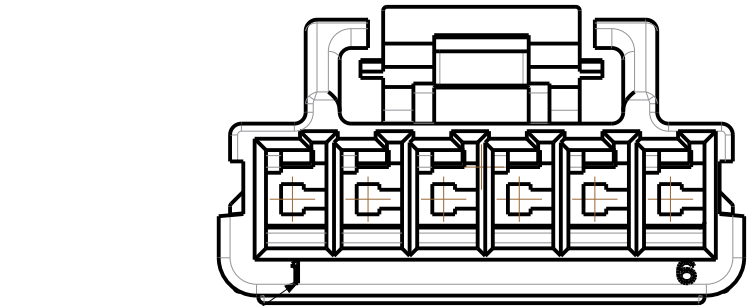

CIRCUIT NO.

- NOTE.
- 1. GENARAL TOLERANCE : ± 0.3 , $\pm 3^\circ$
 - Δ DELIVERY CONDITION : TPA FIRST LOCK POSITION
 - 3. BURR 0.3 MAX.
 - 4. NO CRACK.
 - 5. ALL LETTERS SHALL BE CLEAR AND LEGIBLE

2	020_D_6P_TPA_HSG_GN	PBT GF10	GREEN	1	1
1	020_D_6F_HSG_BK	PBT GF10	BLACK	1	-
	020_D_6F_HSG_NR	PBT GF10	NATURAL	-	1
NO	DESCRIPTION	MATERIAL	FINISH/COLOR	Q'TY	

DRWN	DR KOO	 (주)우주 일렉트로닉스 UJU Electronics co.,Ltd.			
CHKD	KH PARK				
APVD	CY CHOI				
MATERIAL		NAME			
SEE TABLE		020_D_6F_ASSY			
FINISH/COLOR		CUSTOMER DRAWING		DRAWING NO	
SEE TABLE				KH1700107	
WEIGHT		LOC	RESTRICTED TO	SIZE	SCALE
-		-	-	A2	5:1
					SHEET
					1 OF 1
					REV
					A

TOLERANCES UNLESS OTHERWISE SPECIFIED	UNIT	THIRD ANGLE PROJECTION
	MM	
	0	
	0.0	
	0.00	
PRODUCT SPEC	0.000	APPLICATION SPEC
	0.0000	
	ANGLES	
-	-	-