

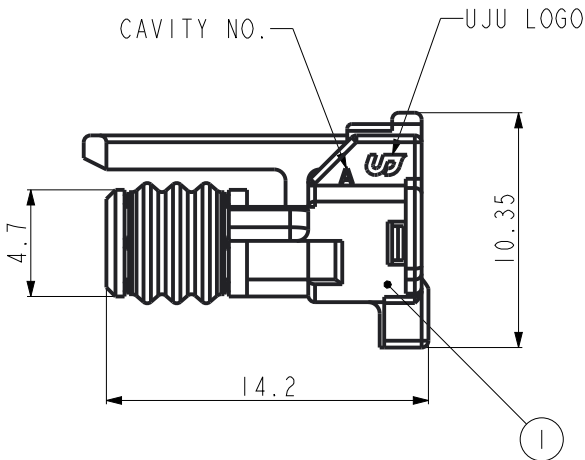
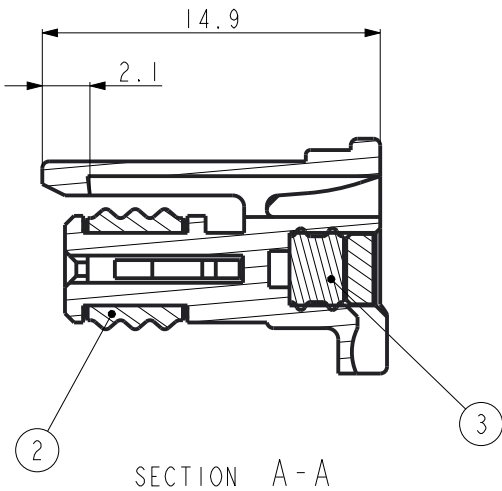
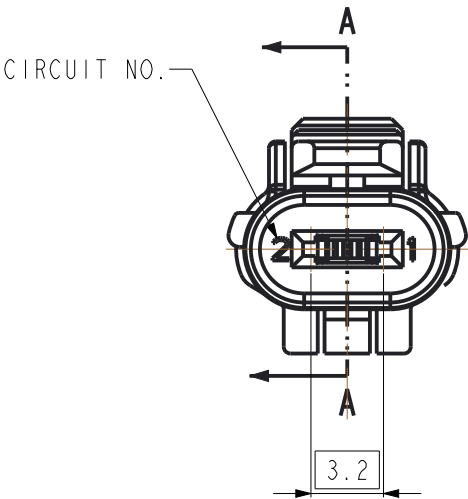
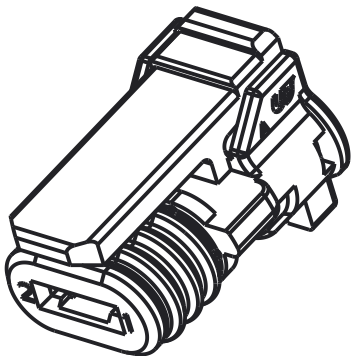


REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	RELEASED	09JAN`19	HS	SH	CY

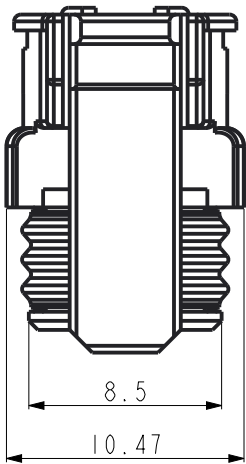

NOTES:

1. GENERAL TOLERANCE: ± 0.3 , $\pm 3^\circ$
2. REFERENCE MATING CONNECTOR IS KHI700120-20.
3. SEE THE FOLLOWING CHART FOR ACCEPTABLE TERMINAL AND WIRE

UJU TERMINAL	KHI600059-21
WIRE INSULATION O.D	1.2 - 1.5mm (0.3, 0.35mm ²)

3	GREEN	SILICONE	KN0000014	020 2P BLOCK SEAL	1
2	GREEN	SILICONE	KN0000013	020 2F INNER SEAL	1
1	BLACK	PA66-GF30	KMI700119-20	020 SLD 2F HSG	1
NO	COLOR	MATERIAL	PART NO.	DESCRIPTION	Q'TY

A	REV
KHI700118-20	ASSEMBLY P/N

TOLERANCES UNLESS OTHERWISE SPECIFIED
0 ±
0.0 ±
0.00 ±
0.000 ±
0.0000 ±
ANGLES ±
PRODUCT SPEC

UNIT MM
THIRD ANGLE PROJECTION
APPLICATION SPEC

DRWN HS LEE	 (주)우주 일렉트로닉스 UJU Electronics co.,Ltd.			
CHKD SH LEE				
APVD CY CHOI	NAME 020(0.5mm) SEALED 2P FEMALE ASSEMBLY			
MATERIAL SEE TABLE	DRAWING NO KHI700118			
FINISH/COLOR SEE TABLE				
WEIGHT	LOC	RESTRICTED TO	SIZE A3	SCALE 3:1
			SHEET 1 OF 1	REV A