
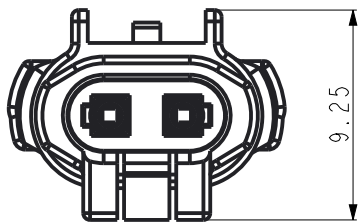
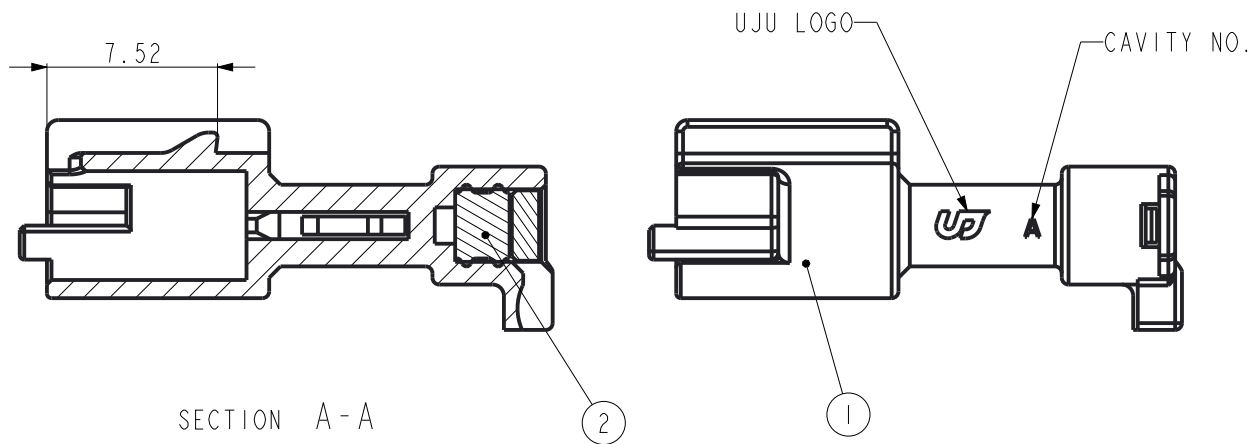
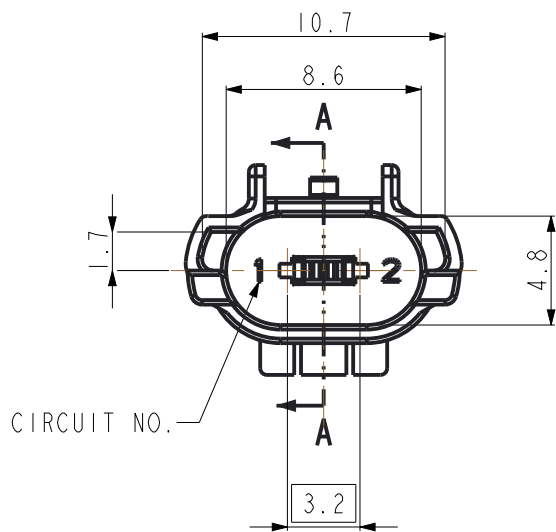
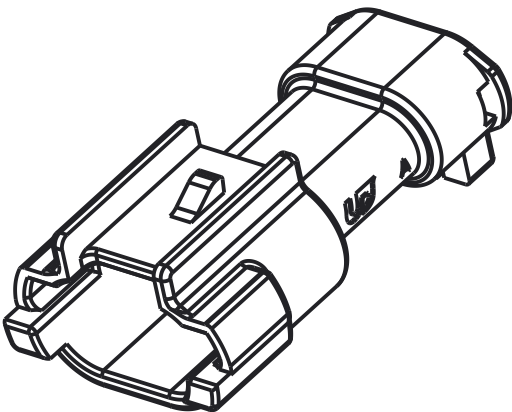


REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	RELEASED	09JAN'19	HS	SH	CY

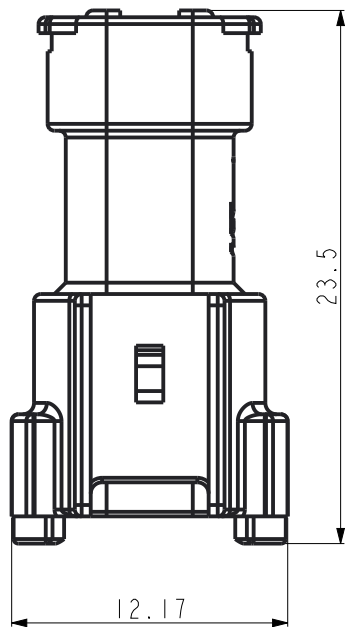

- NOTES:
1. GENERAL TOLERANCE: ± 0.3 , $\pm 3^\circ$
 2. REFERENCE MATING CONNECTOR IS KHI700118-20
 3. SEE THE FOLLOWING CHART FOR ACCEPTABLE TERMINAL AND WIRE

UJU TERMINAL	KHI600060-21
WIRE INSULATION O.D	1.2 - 1.5mm (0.3, 0.35mm ²)

2	GREEN	SILICONE	KN0000014	020 2P BLOCK SEAL	I
I	BLACK	PA66-GF30	KMI700121-20	020 SLD 2M HSG	I
NO	COLOR	MATERIAL	PART NO.	DESCRIPTION	Q'TY

TOLERANCES UNLESS OTHERWISE SPECIFIED 0 0.0 0.00 0.000 0.0000 ANGLES PRODUCT SPEC	UNIT MM
	THIRD ANGLE PROJECTION
APPLICATION SPEC	

DRWN HS LEE	 (주)우주 일렉트로닉스 UJU Electronics co.,Ltd.			
CHKD SH LEE				
APVD CY CHOI	NAME			
MATERIAL SEE TABLE	020(0.5mm) SEALED 2P MALE ASSEMBLY			
FINISH/COLOR SEE TABLE	CUSTOMER DRAWING		DRAWING NO KHI700120	
WEIGHT	LOC	RESTRICTED TO	SIZE A3	SCALE 3:1
			SHEET 1 OF 1	REV A