
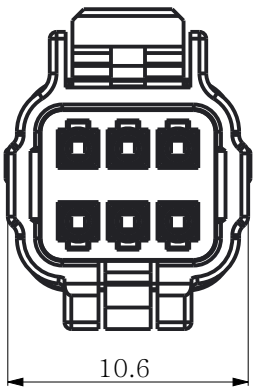
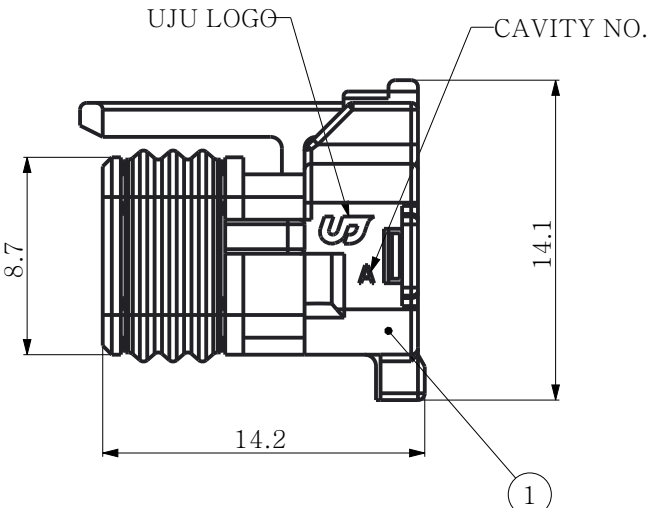
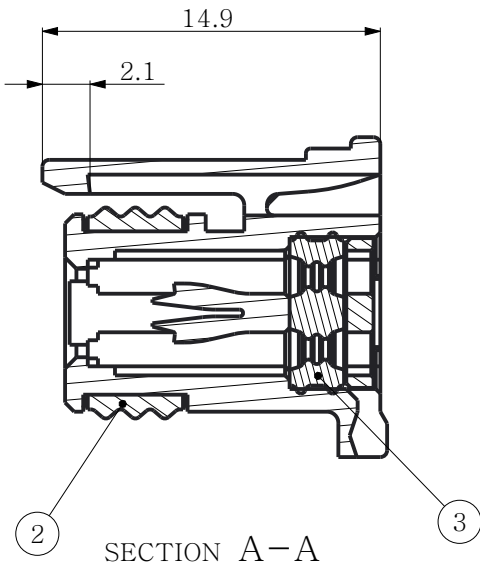
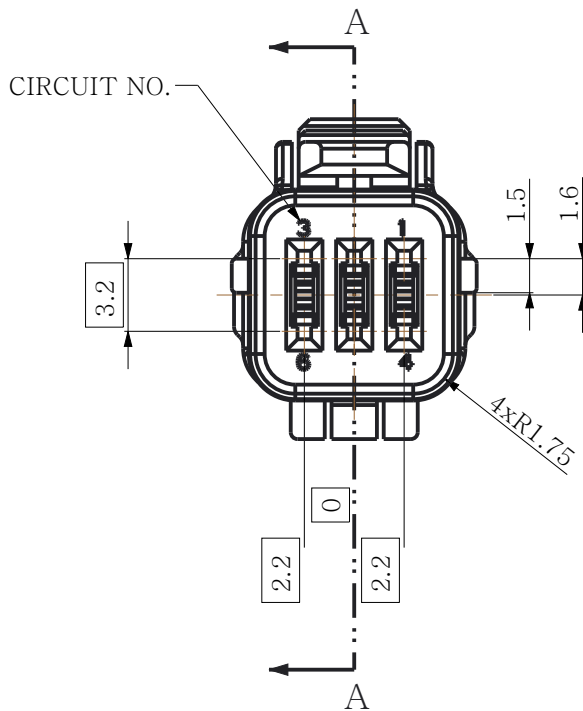
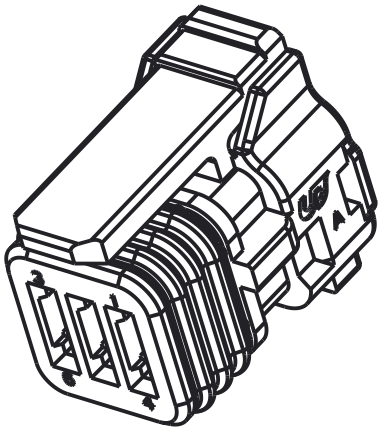


REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	EO NO (RD-2019-179)	18DEC'19	JH	KH	CY

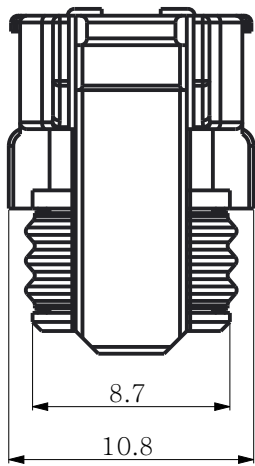

NOTES:

1. GENERAL TOLERANCE: $\pm 0.3, \pm 3^\circ$
2. REFERENCE MATING CONNECTOR IS KH1700124-20.
3. SEE THE FOLLOWING CHART FOR ACCEPTABLE TERMINAL AND WIRE
4. LIMIT THE HSG GATE BURR BELOW 0.3mm

UJU TERMINAL	KH1600059-21
WIRE INSULATION O.D	1.2 - 1.5mm (0.3, 0.35mm ²)

3	GREEN	SILICONE	KN0000016	020 6P BLOCK SEAL	1
2	GREEN	SILICONE	KN0000015	020 6F INNER SEAL	1
1	BLACK	PA66-GF30	KM1700123-20	020 SLD 6F HSG	1
NO	COLOR	MATERIAL	PART NO.	DESCRIPTION	Q'TY

A	REV
KH1700122-20	ASSEMBLY P/N

TOLERANCES UNLESS OTHERWISE SPECIFIED	UNIT MM
0 ±	THIRD ANGLE PROJECTION
0.0 ±	
0.00 ±	
0.000 ±	
0.0000 ±	
ANGLES ±	
PRODUCT SPEC	APPLICATION SPEC

DRWN	JH RYU	 (주)우주일렉트로닉스 UJU Electronics co.,Ltd.			
CHKD	KH PARK				
APVD	CY CHOI	NAME			
MATERIAL	SEE TABLE	020(0.5mm) SEALED 6P FEMALE ASSEMBLY			
FINISH/COLOR	SEE TABLE	CUSTOMER DRAWING		DRAWING NO	
WEIGHT				KH1700122	
LOC	RESTRICTED TO	SIZE	SCALE	SHEET	REV
		A3	3:1	1 OF 1	A