
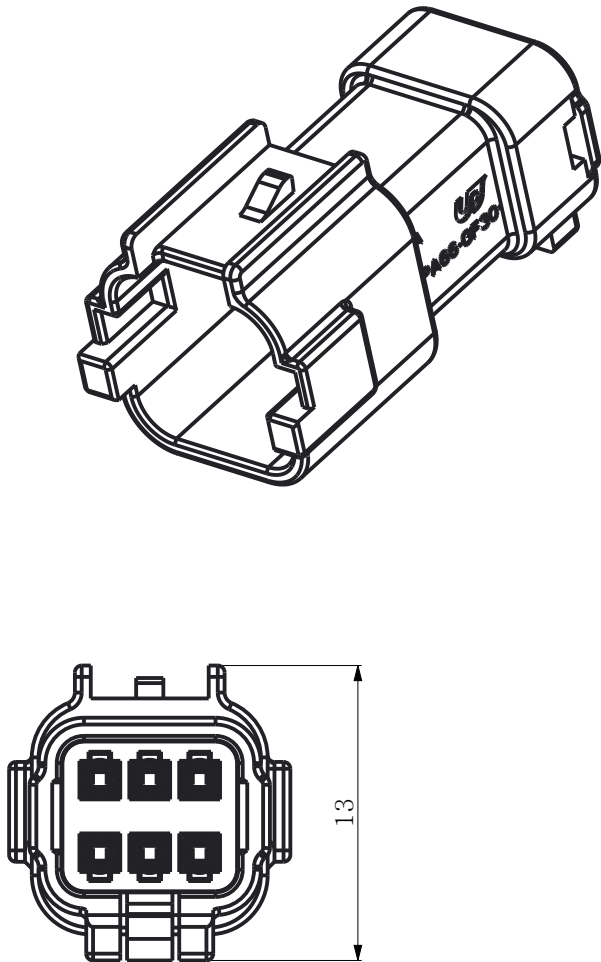
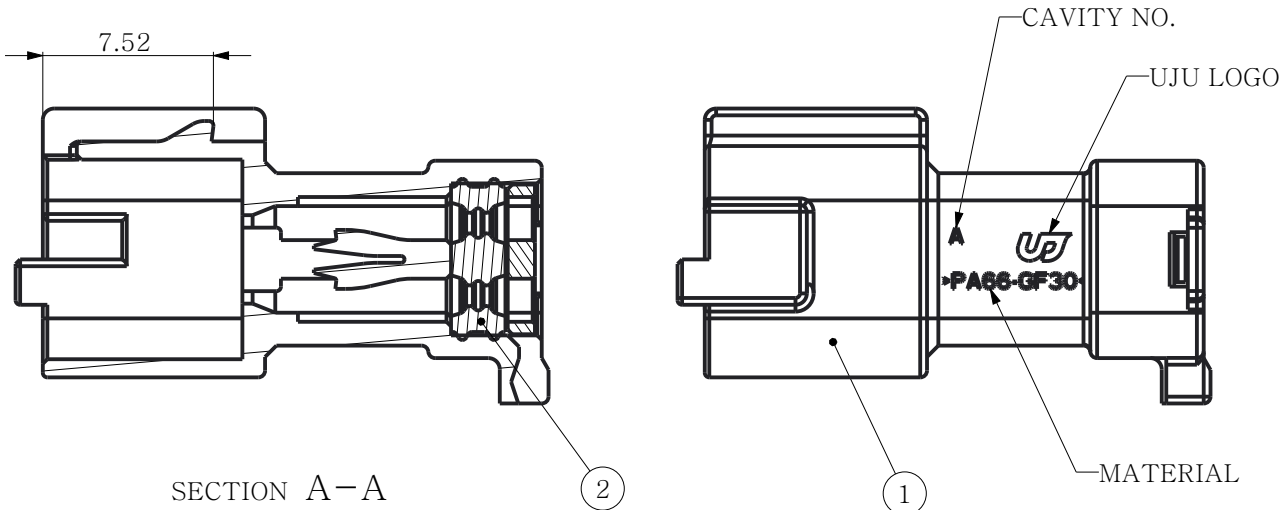


REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	EO NO (RD-2019-179)	18DEC'19	JH	KH	CY

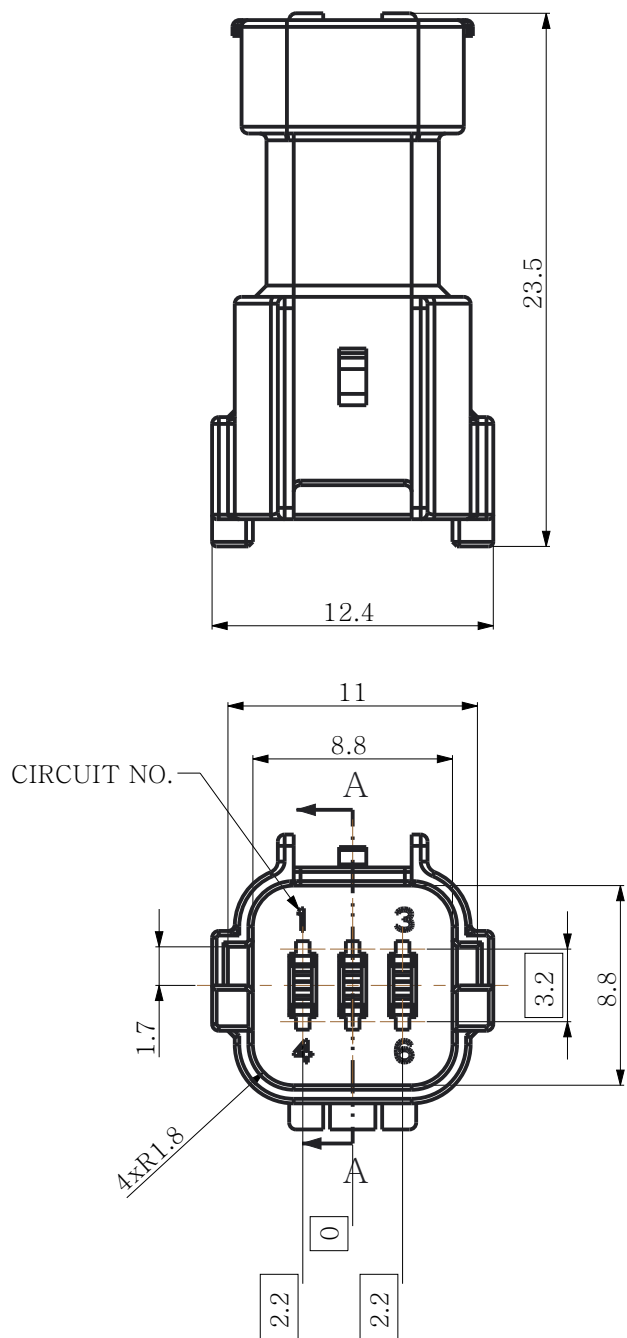

NOTES:

1. GENERAL TOLERANCE: ± 0.3 , $\pm 3^\circ$
2. REFERENCE MATING CONNECTOR IS KH1700122-20
3. SEE THE FOLLOWING CHART FOR ACCEPTABLE TERMINAL AND WIRE
4. LIMIT THE HSG GATE BURR BELOW 0.3mm

UJU TERMINAL	KH1600060-21
WIRE INSULATION O.D	1.2 - 1.5mm (0.3, 0.35mm ²)

TOLERANCES UNLESS OTHERWISE SPECIFIED
0 ±
0.0 ±
0.00 ±
0.000 ±
0.0000 ±
ANGLES ±
PRODUCT SPEC

UNIT MM
THIRD ANGLE PROJECTION
APPLICATION SPEC

2	GREEN	SILICONE	KN0000016	020 6P BLOCK SEAL	1
1	BLACK	PA66-GF30	KM1700125-20	020 SLD 6M HSG	1
NO	COLOR	MATERIAL	PART NO.	DESCRIPTION	Q'TY
DRWN		JH RYU	 (주)우주일렉트로닉스 UJU Electronics co.,Ltd.		
CHKD		KH PARK			
APVD		CY CHOI			
MATERIAL		SEE TABLE	NAME		
FINISH/COLOR		SEE TABLE	020(0.5mm) SEALED 6P MALE ASSEMBLY		
WEIGHT			CUSTOMER		
			DRAWING		
			KH1700124		
			LOC	RESTRICTED TO	SIZE
					SCALE
					SHEET
					REV
					A