


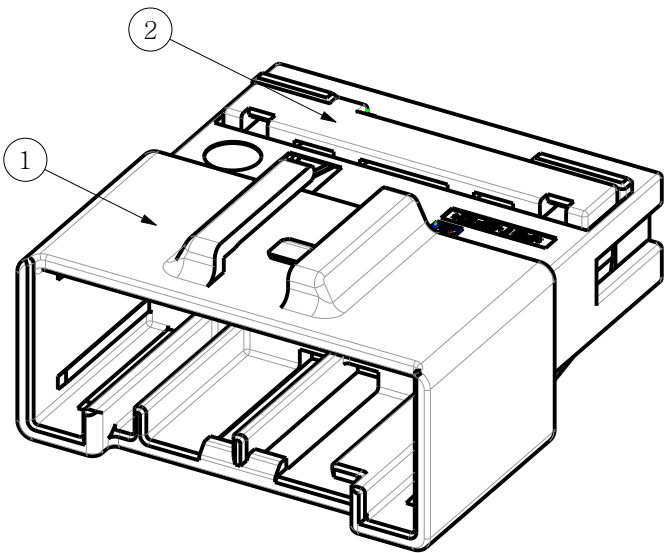
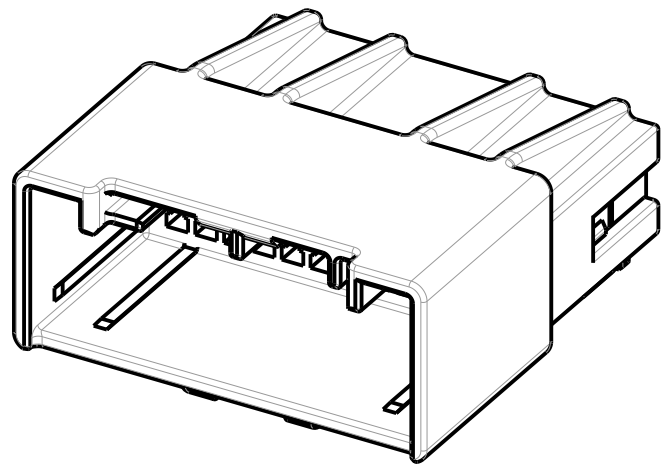
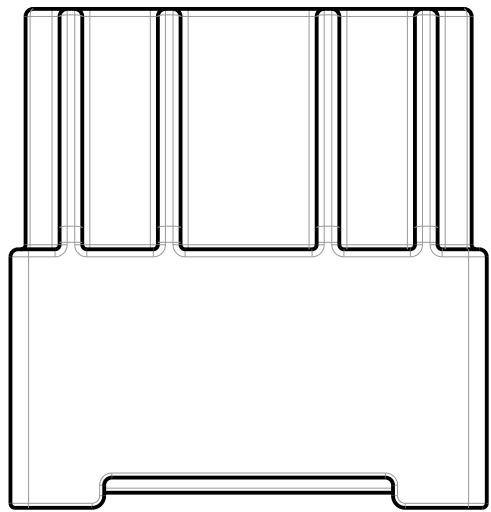
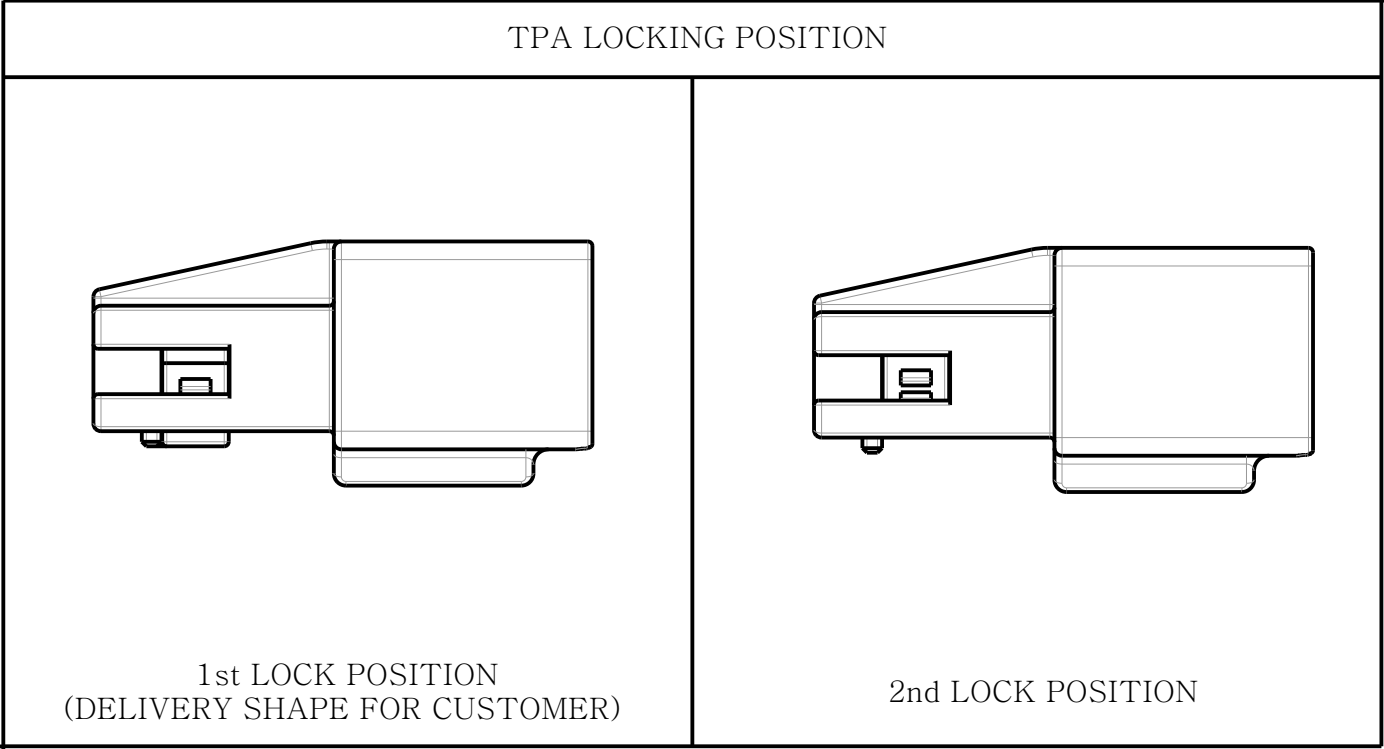
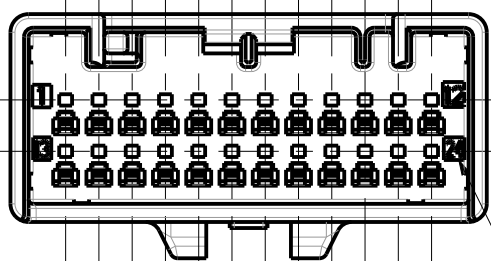


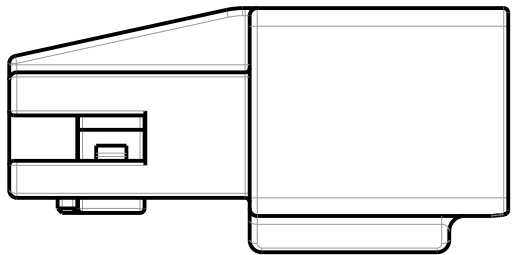

ISO VIEW

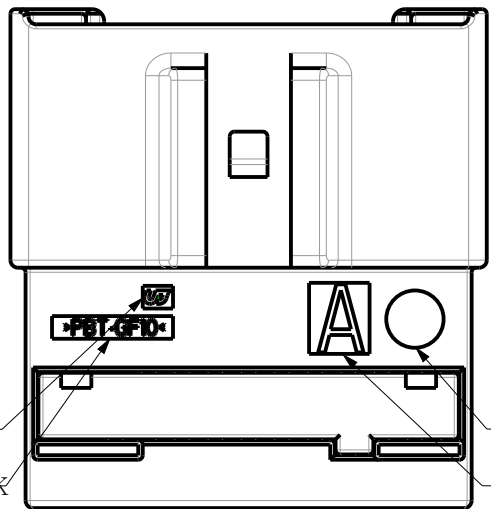

CIRCUIT NO.

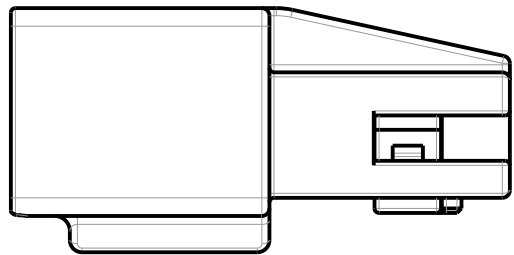

UJU LOGO
RECYCLE MARK

DATE MARK (MM/YY)
CAVITY NO.

TOLERANCE								
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE
± 0.15	± 0.20	± 0.30	± 0.40	± 0.50	± 0.75	± 0.9	± 1.4	± 0.5°

TABLE-1

025_II_24M_ASSY_NR	KH2100053-10	-	PBT-GF10	NATURAL
025_II_24M_ASSY_BK	KH2100053-20	-	PBT-GF10	BLACK
DESCRIPTION	PART NO.	CODE	MATERIAL	FINISH/COLOR

TABLE-2

025_II_MALE_TERMINAL(M)	KH2000017-21	0.3 ~ 0.5 SQ	COPPER ALLOY	PRE-TIN
DESCRIPTION	PART NO.	WIRE RANGE	MATERIAL	FINISH

- NOTE
1. GENERAL TOLERANCE : SEE TABLE TOLERANCE
 2. DELIVERY CONDITION : TPA FIRST LOCK POSITION
 3. HSG DESCRIPTION : SEE TABLE-1
 4. APPLICABLE RECEPTACLE TERMINAL : SEE TABLE-2
 5. REFERENCE MATING CONNECTOR IS KH2100049

2	025_II_24M_TPA_GR	KM2100054-30	-	PBT-GF10	GRAY	1	1
1	025_II_24M_HSG_NR	KM2100053-10	-	PBT-GF10	NATURAL	1	
	025_II_24M_HSG_BK	KM2100053-20	-	PBT-GF10	BLACK		1
NO.	DESCRIPTION	PART NO.	CODE	MATERIAL	FINISH/COLOR	Q'TY	

TOLERANCES UNLESS OTHERWISE SPECIFIED
0 ±
0.0 ±
0.00 ±
0.000 ±
0.0000 ±
ANGLES ±
PRODUCT SPEC

UNIT MM
THIRD ANGLE PROJECTION
APPLICATION SPEC

DRWN SJ.LEE
CHKD KH.PARK
APVD CY.CHOI
MATERIAL SEE TABLE
FINISH/COLOR SEE TABLE
WEIGHT

 (주)우주 일렉트로닉스 UJU Electronics co.,Ltd.		NAME 025_II_24M_ASSY			
		CUSTOMER DRAWING	DRAWING NO KH2100052		
LOC	RESTRICTED TO	SIZE A2	SCALE 2:1	SHEET 1 OF 1	REV 1