







REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
A	ENGINEERING RELEASED (RD-2022-071)	07 JUL '22	JH	KH	CY

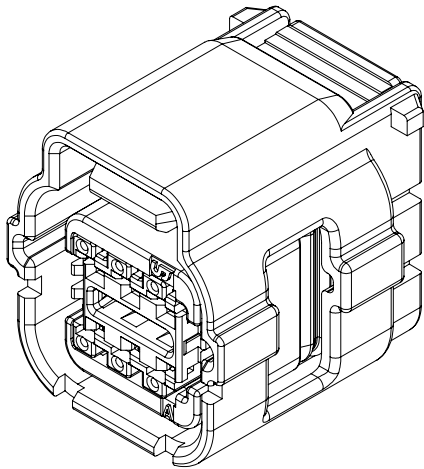

ISO View

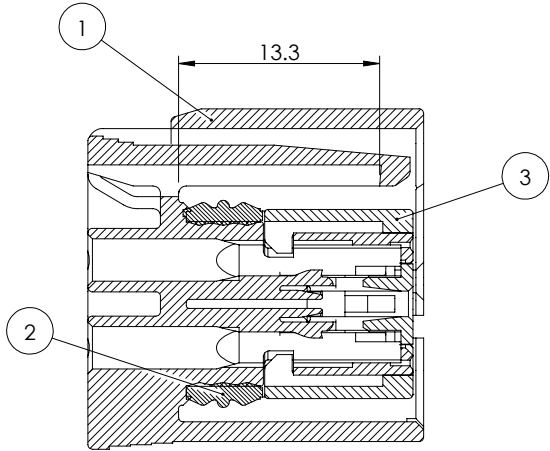

SECTION A-A

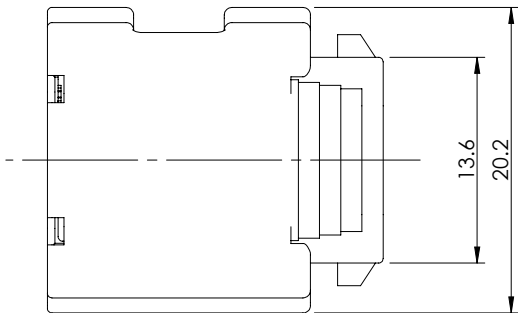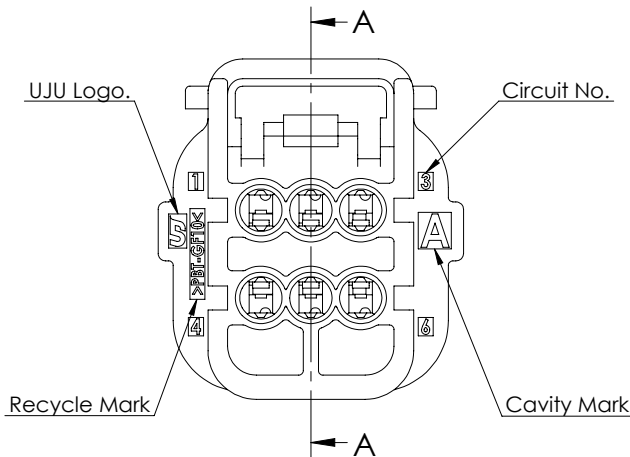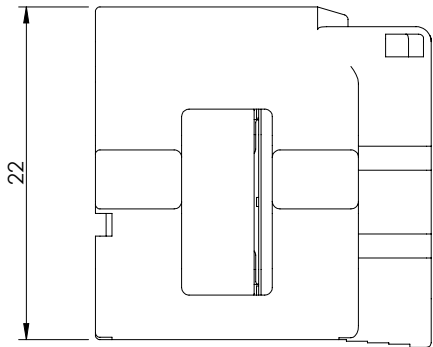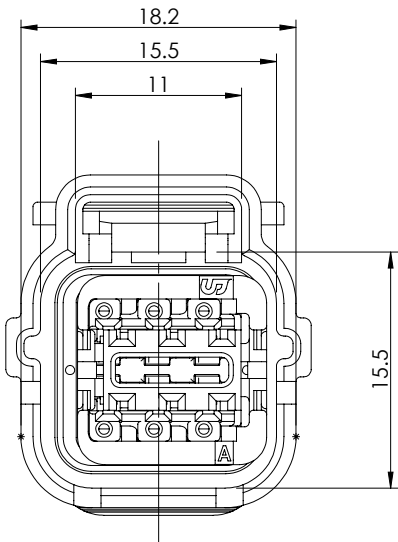

- NOTE -

1. This is a WATERPROOF connector.
2. Before using, check the HARMFUL CRACK, BURR, etc.
3. General Tolerance : See TOLERANCE table
4. Delivery condition : TPA 1st. lock position
5. All letters shall be clear and legible.
6. Matching Connector
- 025_SLD_6M_ASSY [KH2100071]

7. ASSY Parts.
- Terminal

Series	Applicable wire(SQ)	Description	Part No.
025	AESSXF 0.22	025_SLD_F_TML_S	KH2000034-20
	AESSXF 0.3 ~ 0.5	025_SLD_F_TML_M	KH2000034-21

- Wire Seal

Series	Applicable wire(SQ)	Description	Part No.
025	ø1.2 ~ ø1.3	025_SLD_Wire Seal_S	KD0000002
	ø1.4 ~ ø1.5	025_SLD_Wire Seal_M	KD0000004
	ø1.6 ~ ø1.7	025_SLD_Wire Seal_L	KD0000005
	CLOSED SEAL	025_SLD_Dummy Seal	KD0000003

3	025_SLD_6F_TPA	KM2100069-10	PBT-GF30	Natural	-	1
2	025_SLD_6F_Inner Seal	KN0000021	Si-Rubber	Gray	-	1
1	025_SLD_6F_HSG	KM2100068-20	PBT-GF10	Black	-	1
No.	Description	Part No.	Material	Finish / Color	Q'ty	



DRWN JH. LEE	UNIT MM	THIRD ANGLE PROJECTION	MATERIAL PBT+GF10	FINISH/COLOR BLACK	WEIGHT	NAME 025_SLD_6F_ASSY
CHKD KH. PARK						CUSTOMER
APVD CY. CHOI						DRAWING NO KH2100067
LOC	RESTRICTED TO	SIZE A3	SCALE -	SHEET 1 of 1	REV A	

TOLERANCE								
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE
± 0.15	± 0.20	± 0.30	± 0.40	± 0.50	± 0.75	± 0.9	± 1.4	± 0.5°