

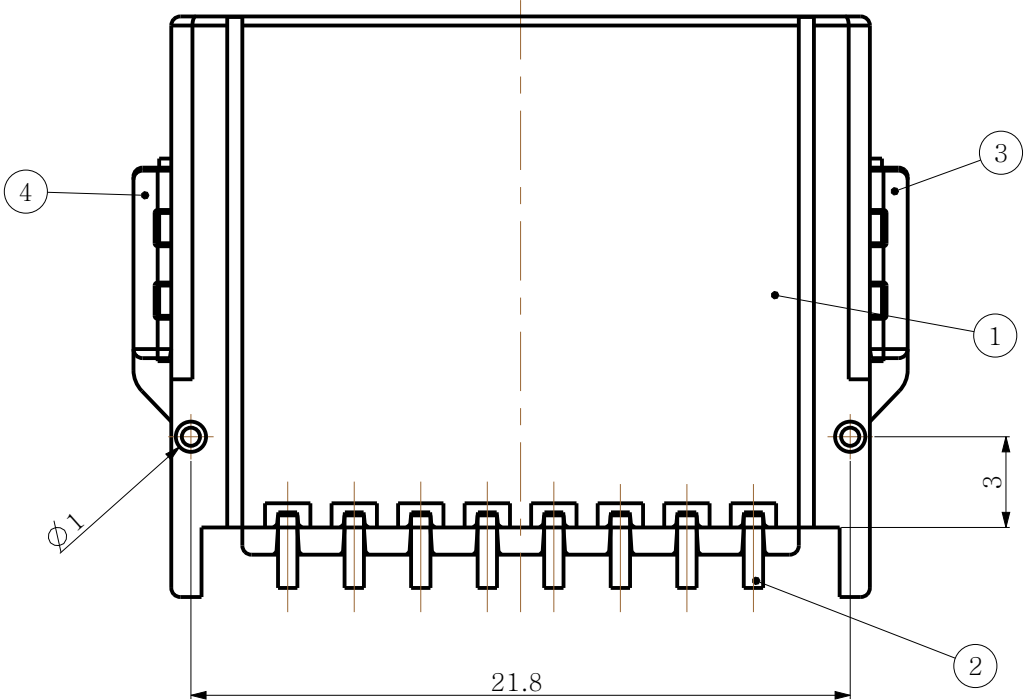
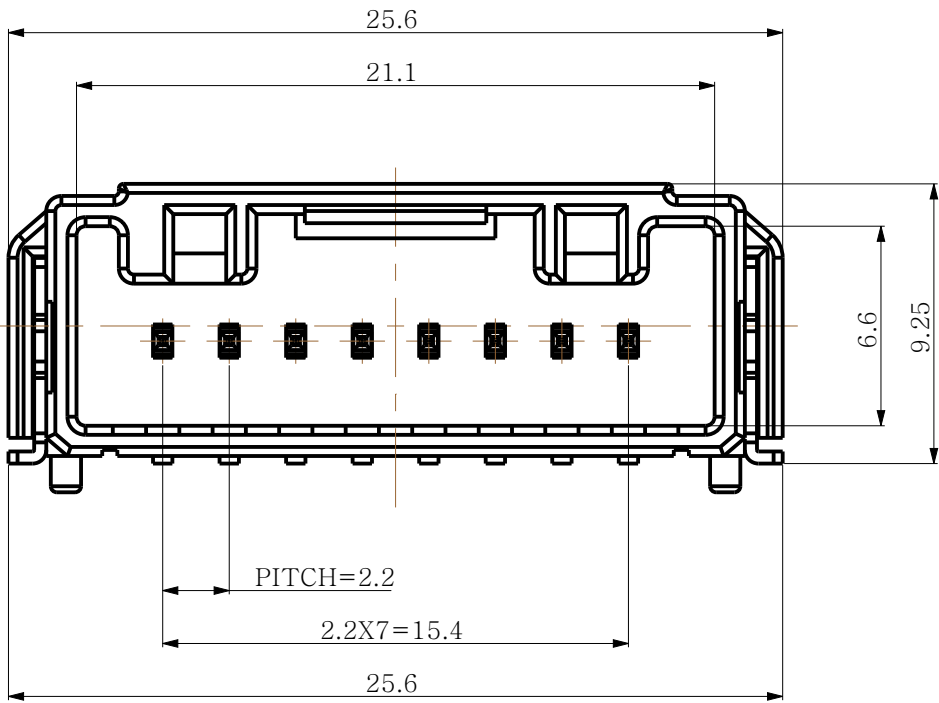
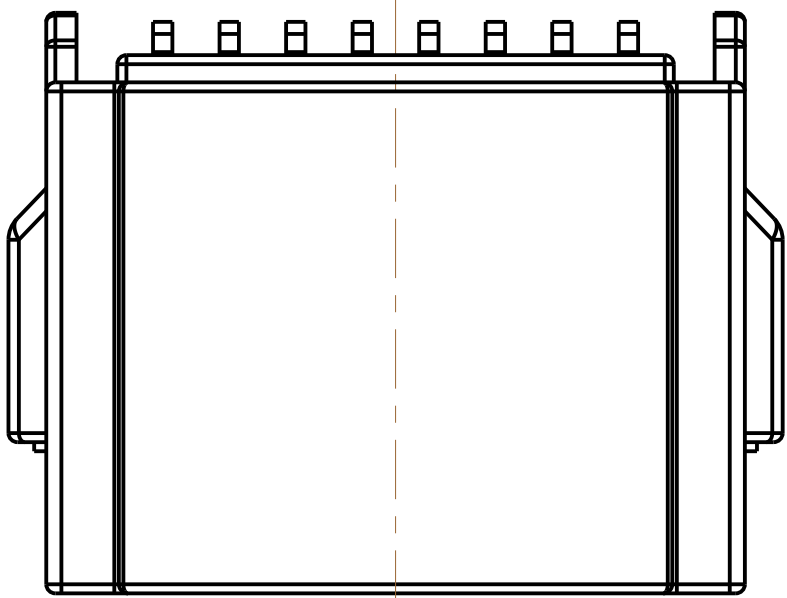
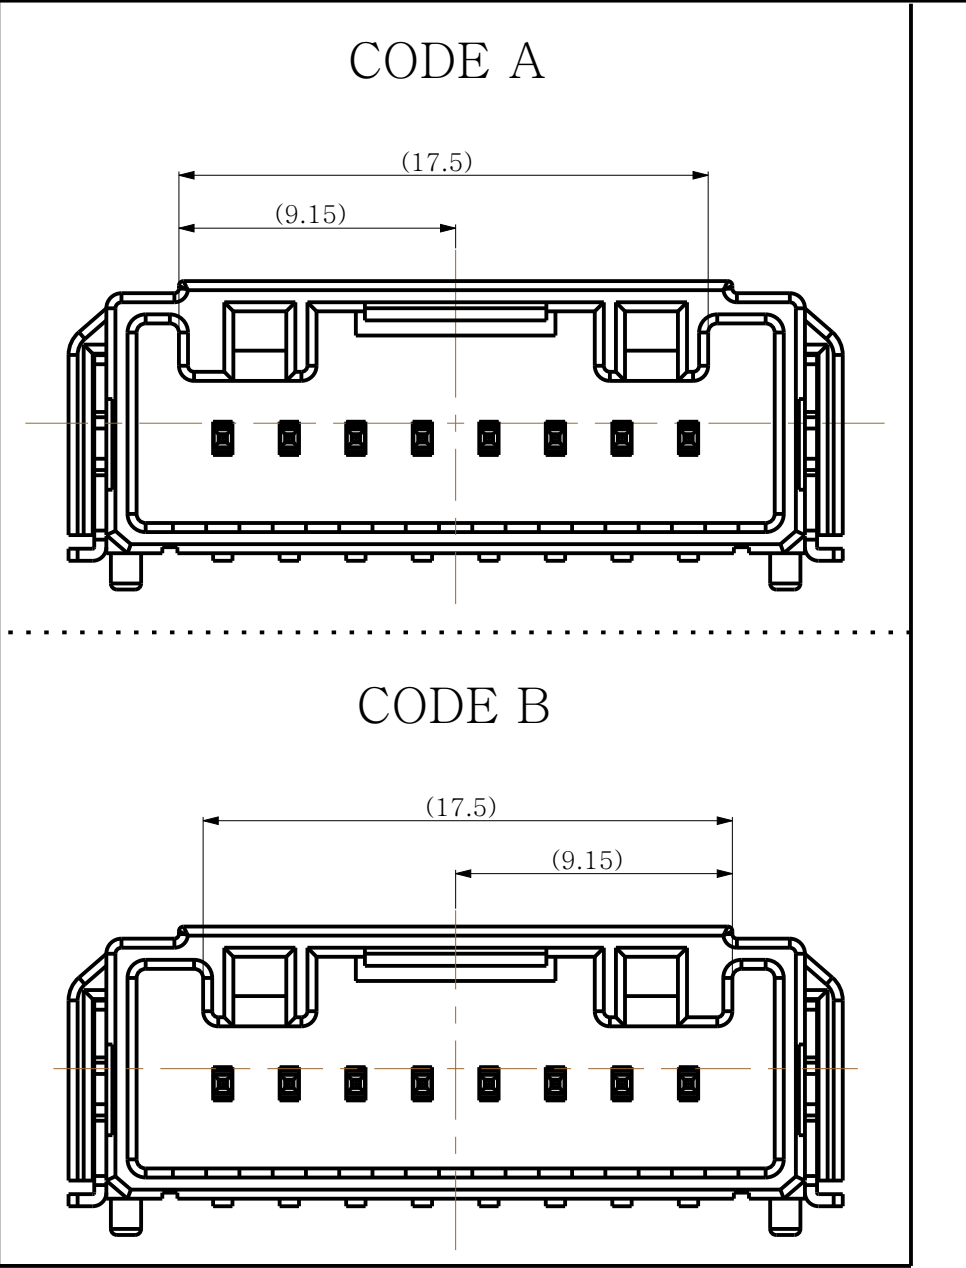
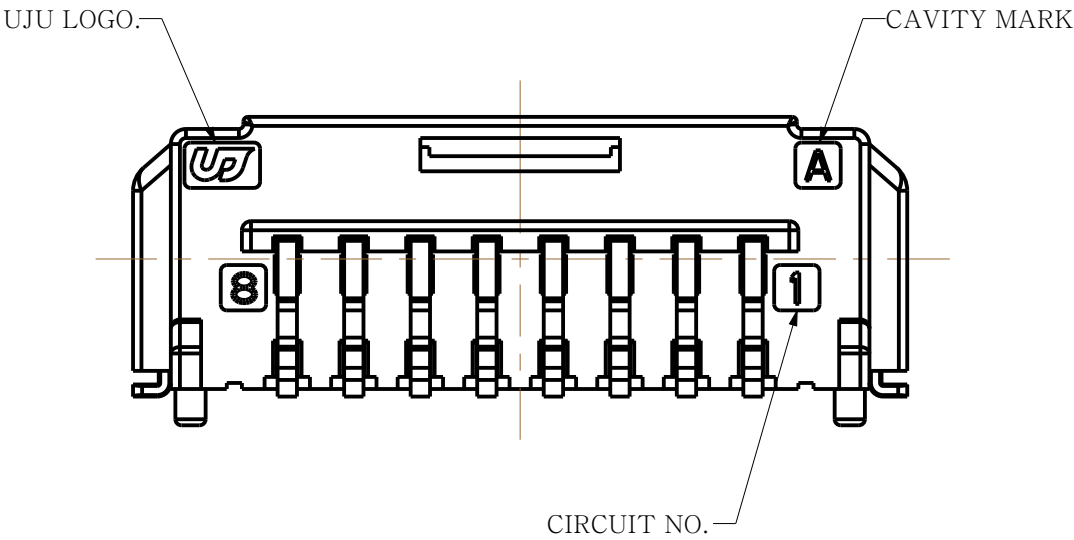


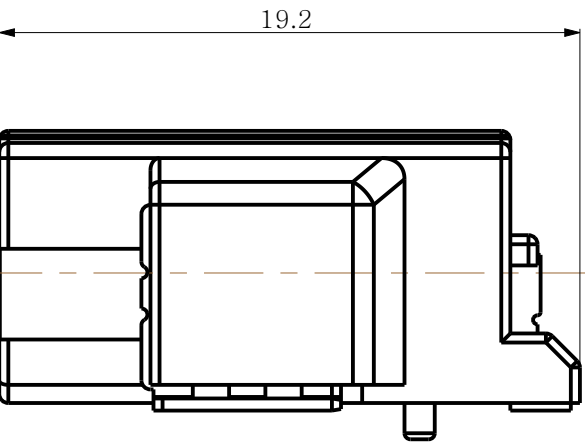

TOLERANCE									ANGLE
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR		
± 0.15	± 0.20	± 0.30	± 0.40	± 0.50	± 0.75	± 0.9	± 1.4	± 0.5°	

UAD-RD-0008 REV.01[201112]

PCB PATTERN

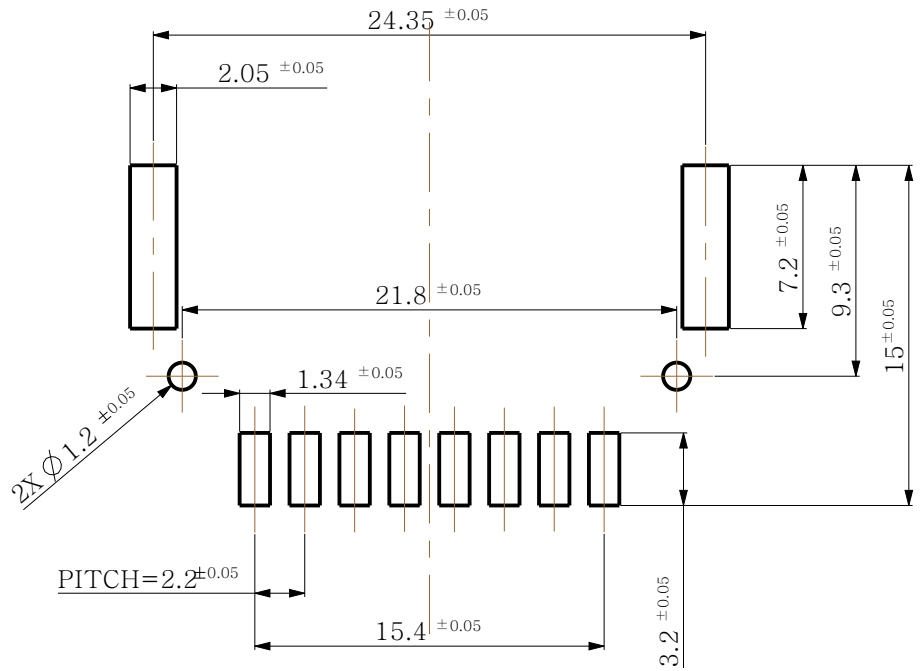

NOTE

- General Tolerance : SEE TABLE TOLERANCE
- HSG DESCRIPTION : SEE TABLE-1
- MATERIAL
 - HDR HSG : PPA-GF15
 - SOLDER PEG : COPPER ALLOY (POST-TIN)
 - TAB TML : COPPER ALLOY (POST-TIN)

TABLE-1

4	025 SMT SOLDER PEG-LEFT (HZT)	KM1300054-21	-	BRASS	POST-TIN	1	1
3	025 SMT SOLDER PEG-RIGHT (HZT)	KM1300054-20	-		POST-TIN	1	1
2	025 SMT TAB TML (HZT)	KM1300053-20	-	BRASS	POST-TIN	8	8
1	025 SMT 8M HDR HSG (HZT)	KM1300056-21	B	PPA GF15	BLACK	1	-
		KM1300056-10	A		NATURAL	-	1
NO.	DESCRIPTION	PART NO.	CODE	MATERIAL	FINISH/COLOR	Q'TY	Q'TY

TOLERANCES UNLESS OTHERWISE SPECIFIED 0 ± 0.0 ± 0.00 ± 0.000 ± 0.0000 ± ANGLES ± PRODUCT SPEC	UNIT MM THIRD ANGLE PROJECTION APPLICATION SPEC	DRWN KH.PARK	(주)우주 일렉트로닉스 UJU Electronics co.,Ltd.				
		CHKD CY.CHOI					
		APVD SJ.SONG	NAME				
		MATERIAL SEE TABLE-1	025 SMT 8M HDR ASSY (HZT)				
WEIGHT	FINISH/COLOR SEE TABLE-1	CUSTOMER		DRAWING NO			
		DRAWING		KH1300055			
LOC		RESTRICTED TOP	SIZE	SCALE	SHEET	REV	
		A2	4:1	1 of 1	A		

ISO VIEW

4

3

2

1