

TOLERANCE								
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE
± 0.15	± 0.20	± 0.30	± 0.40	± 0.50	± 0.75	± 0.9	± 1.4	± 0.5도

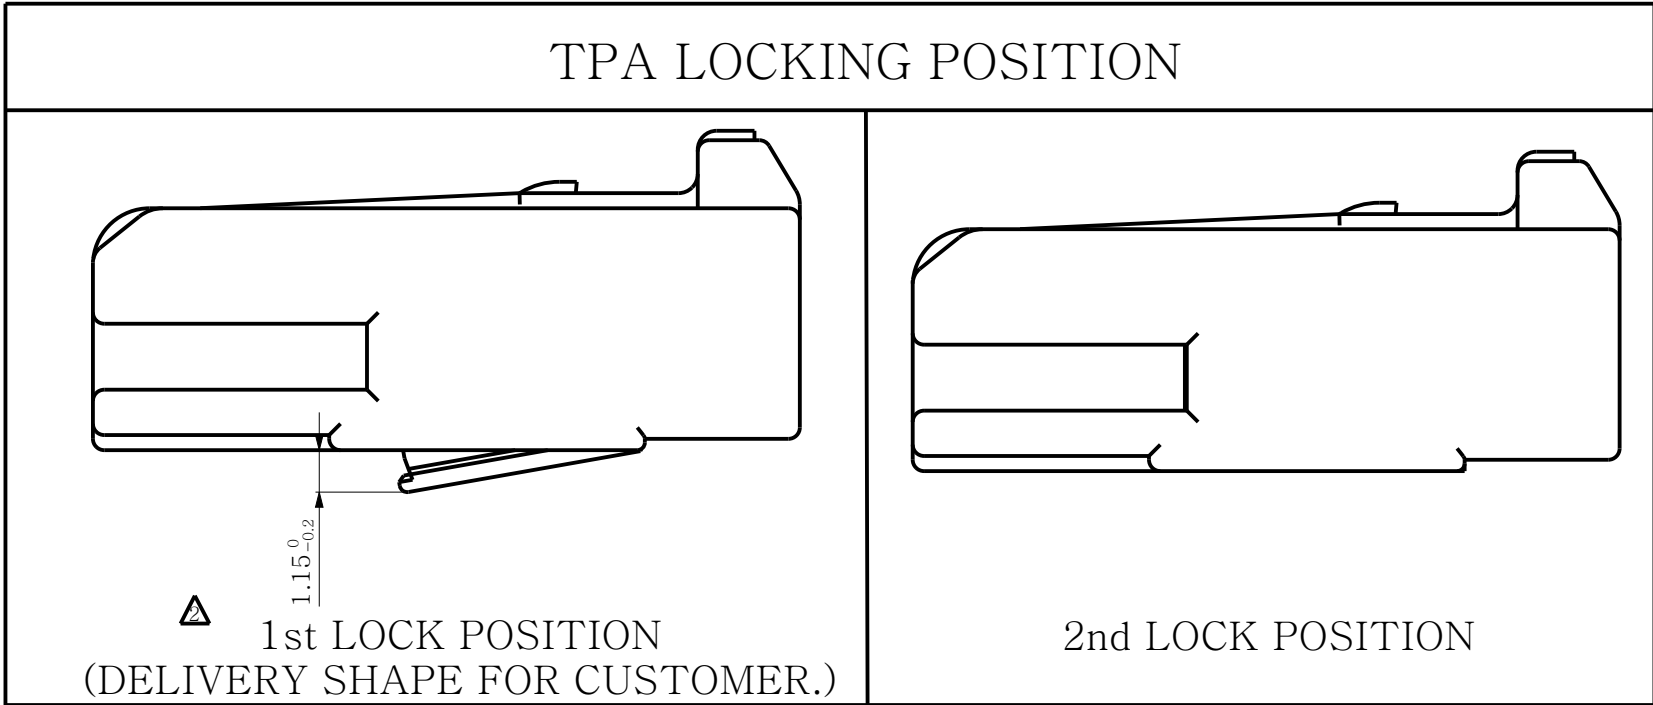
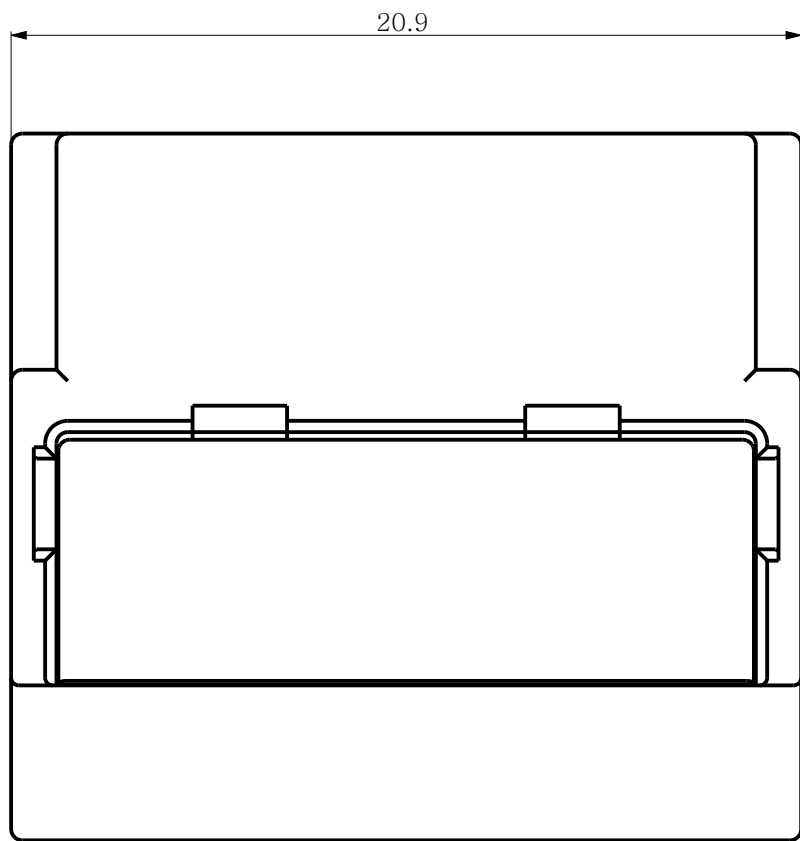
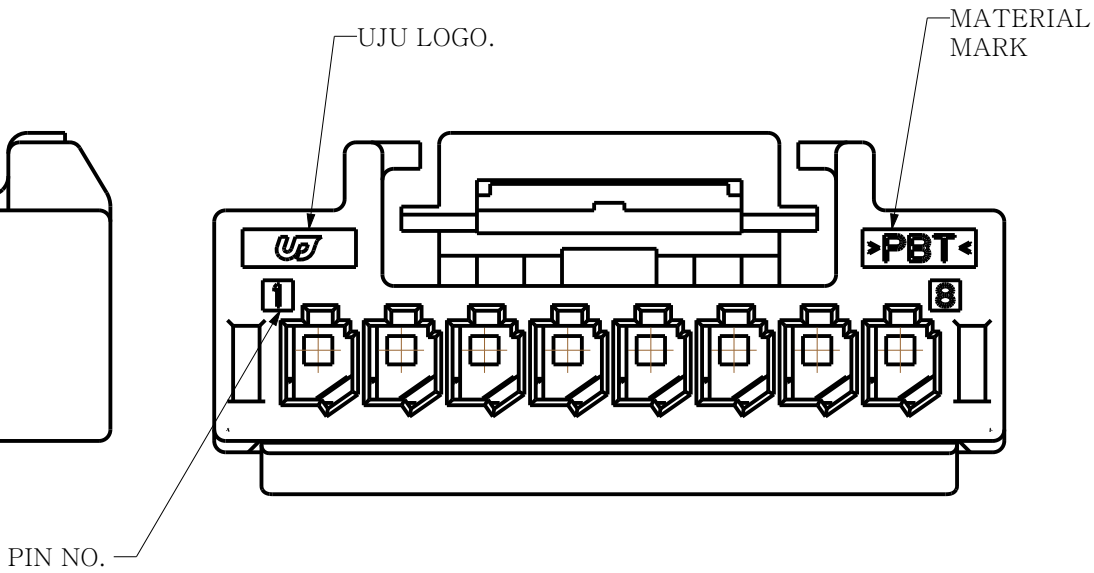
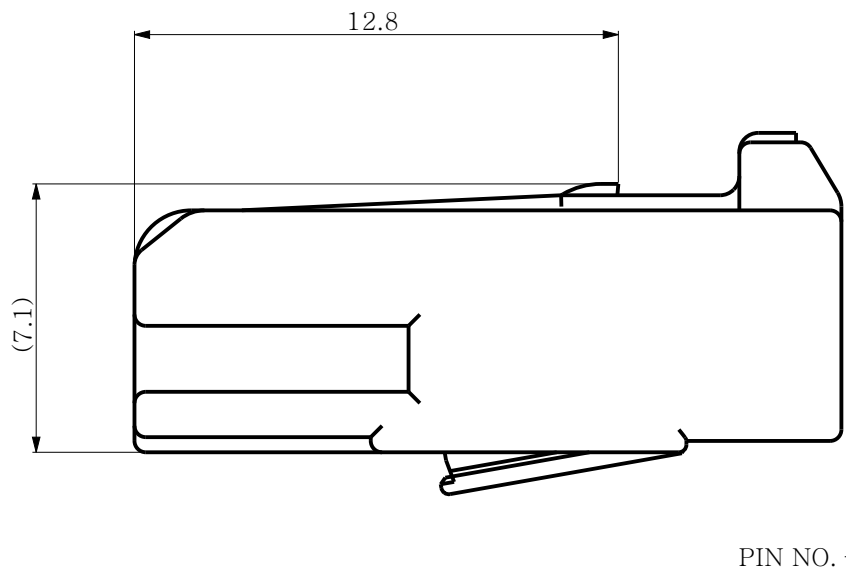
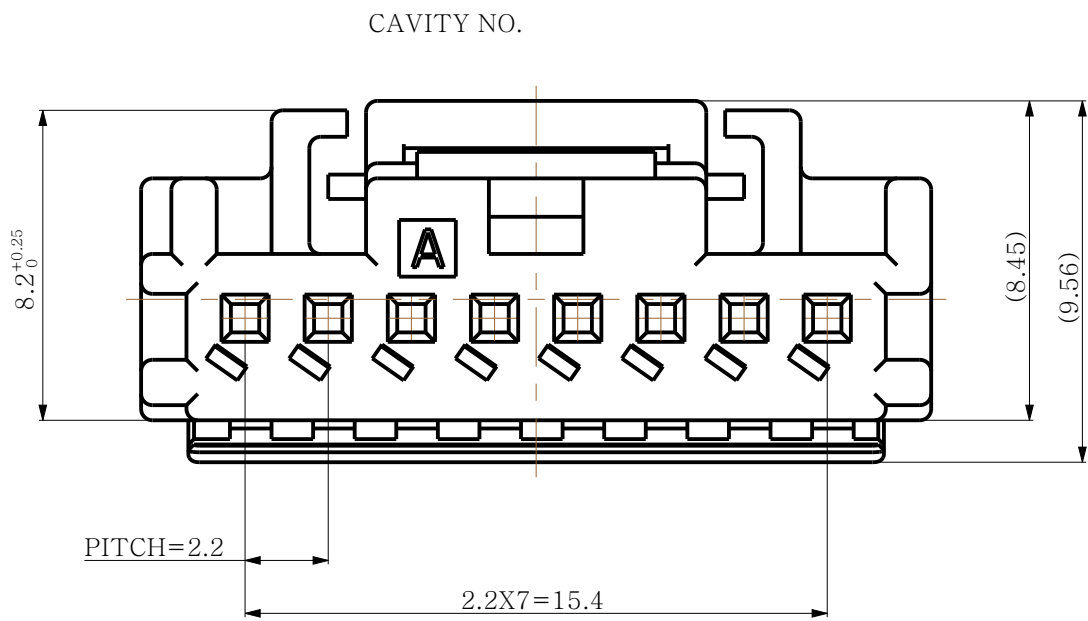
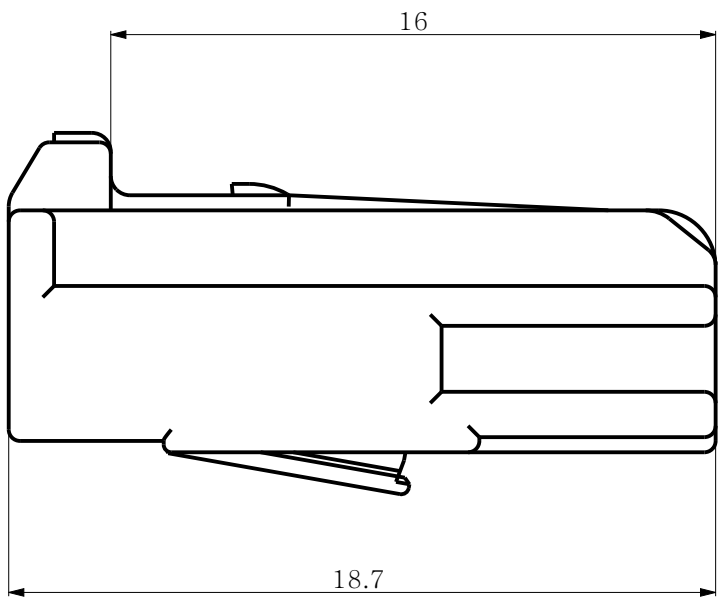
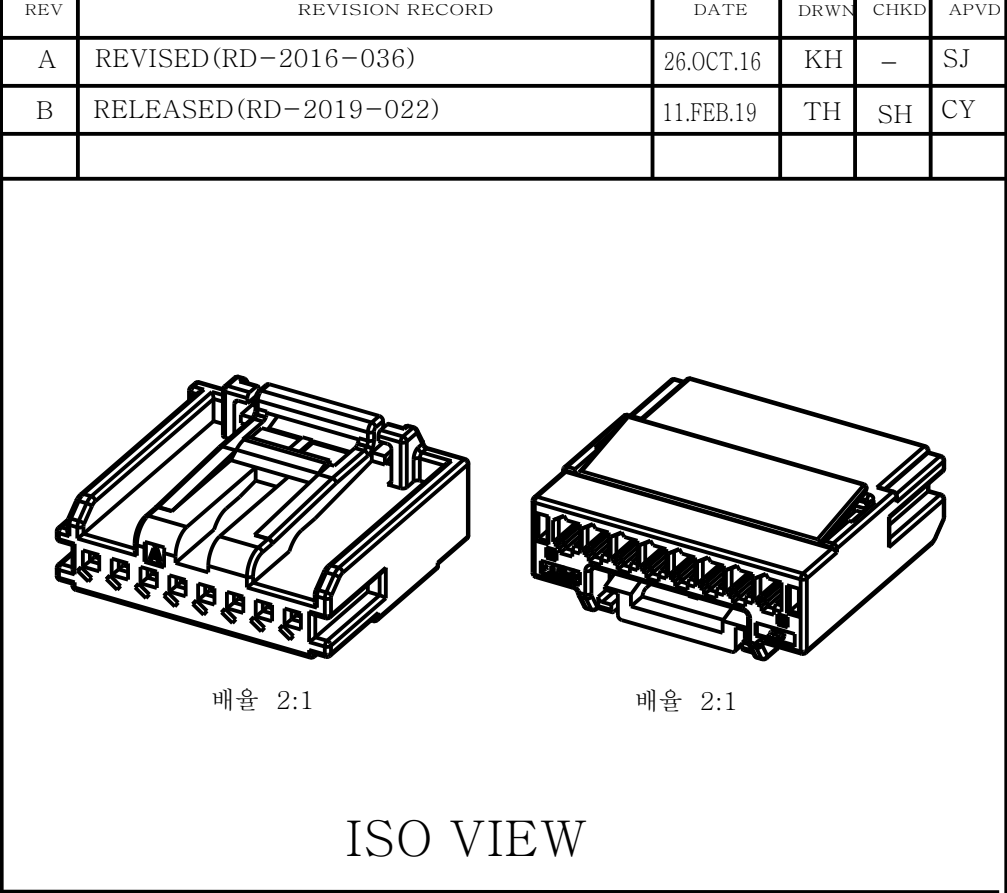
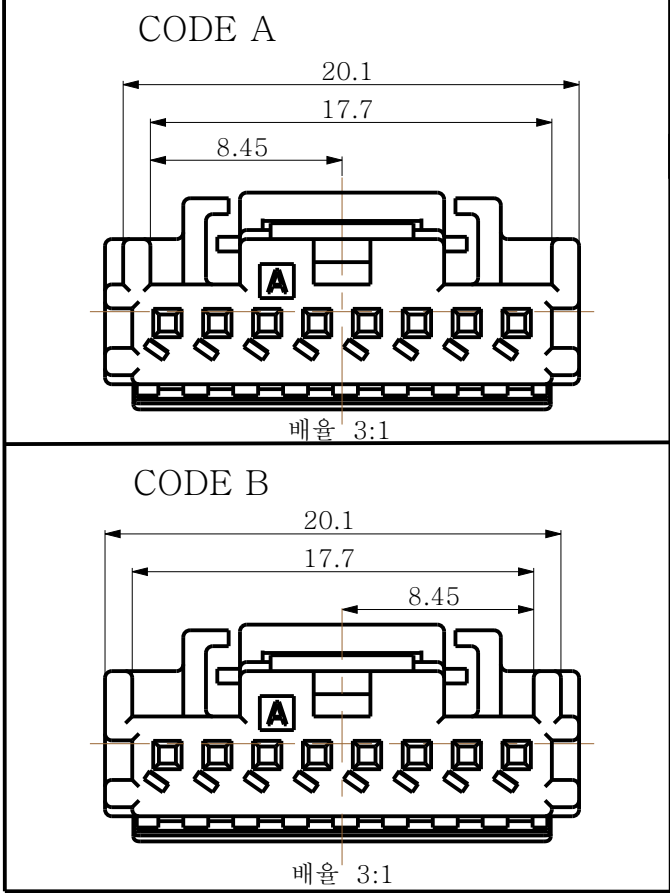
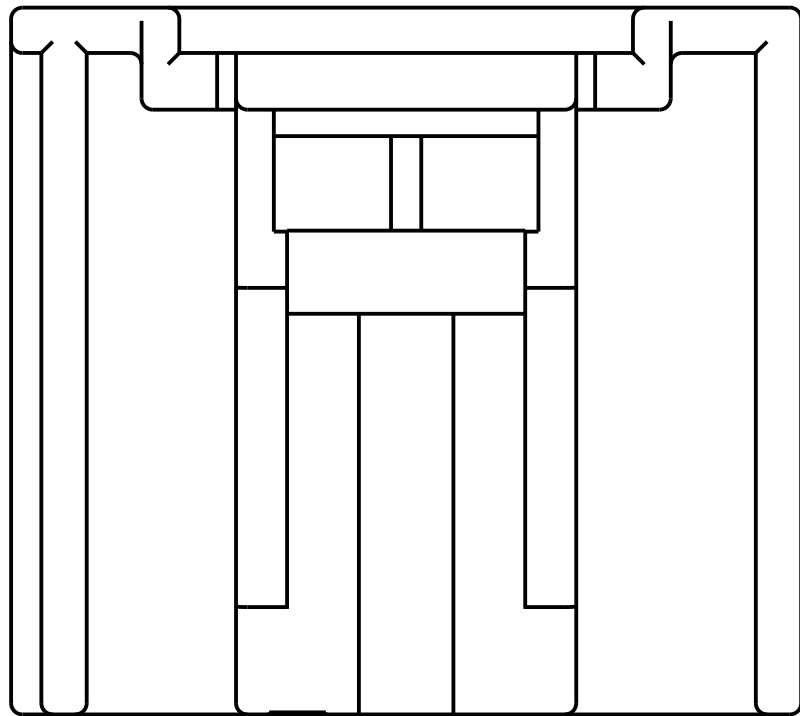



TABLE 1

025 8F ASSY	KH1400045-21	B	PBT	BLACK
	KH1400045-10	A		NATURAL
DESCRIPTION	PART. NO.	CODE	MATERIAL	FINISH/COLOR

TABLE 2

025 FEMALE TERMINAL	KH1200031-21	0.3 ~ 0.5 SQ	Cu Alloy	Pre-TIN
	KH1200031-20	0.22 SQ	Cu Alloy	Pre-TIN
DESCRIPTION	PART. NO.	WIRE RANGE	MATERIAL	FINISH

- NOTE
1. GENERAL TOLERANCE : SEE TABLE TOLERANCE
 2. DELIVERY CONDITION : TPA FIRST LOCK POSITION.
 3. APPLICABLE RECEPTACLE TERMINAL : TABLE-2

TOLERANCES UNLESS OTHERWISE SPECIFIED 0 ± 0.0 ± 0.00 ± 0.000 ± 0.0000 ± ANGLES ± PRODUCT SPEC		UNIT MM THIRD ANGLE PROJECTION  APPLICATION SPEC		DRWN TH.LEE		 (주)우주 일렉트로닉스 UJU Electronics co.,Ltd.			
				CHKD SH.LEE					
				APVD CY.CHOI		NAME 025 8F ASSY			
				MATERIAL SEE TABLE 1					
		FINISH/COLOR SEE TABLE 1		CUSTOMER DRAWING		DRAWING NO KH1400045			
		WEIGHT 1.74g		LOC RESTRICTED TO		SIZE A2	SCALE	SHEET 1 of 1	REV B