

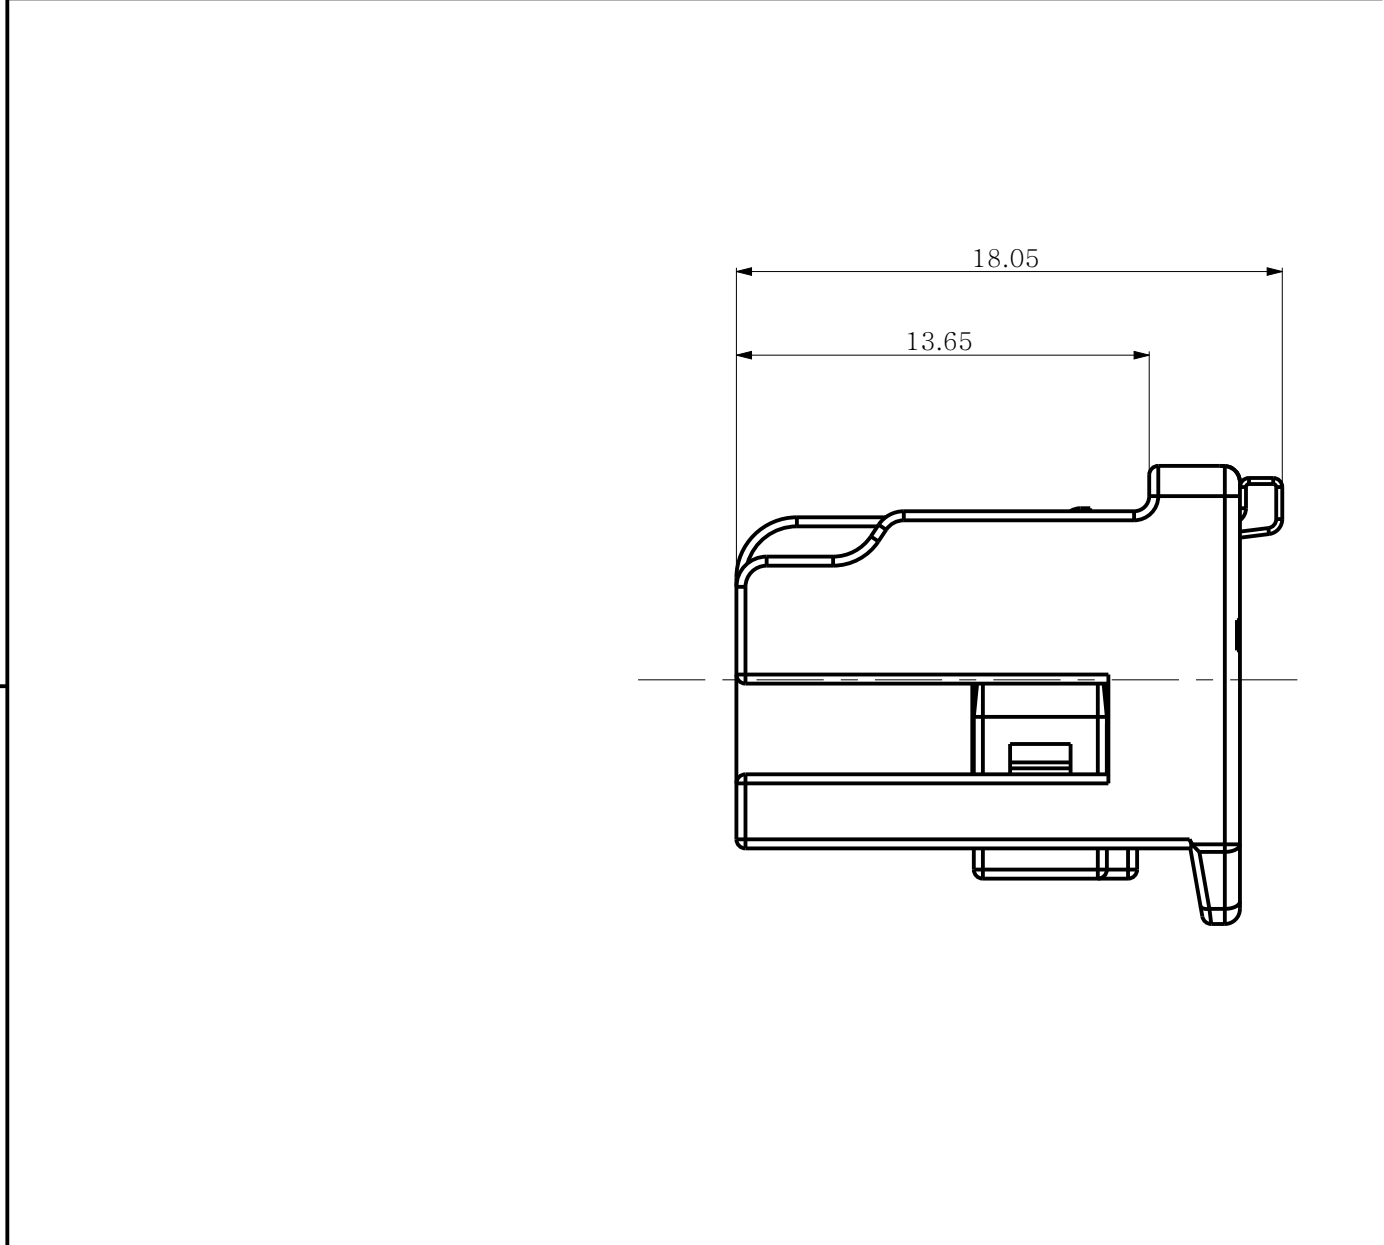
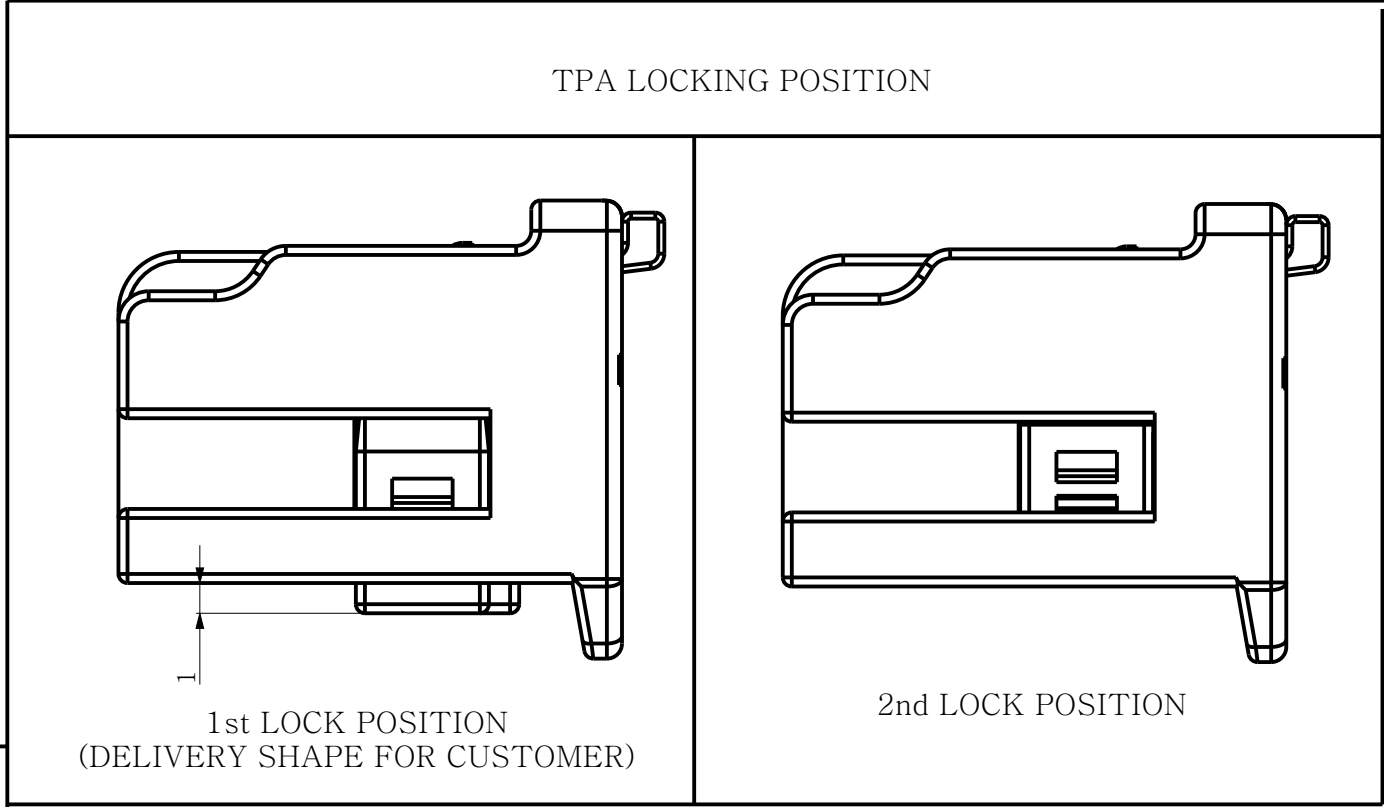
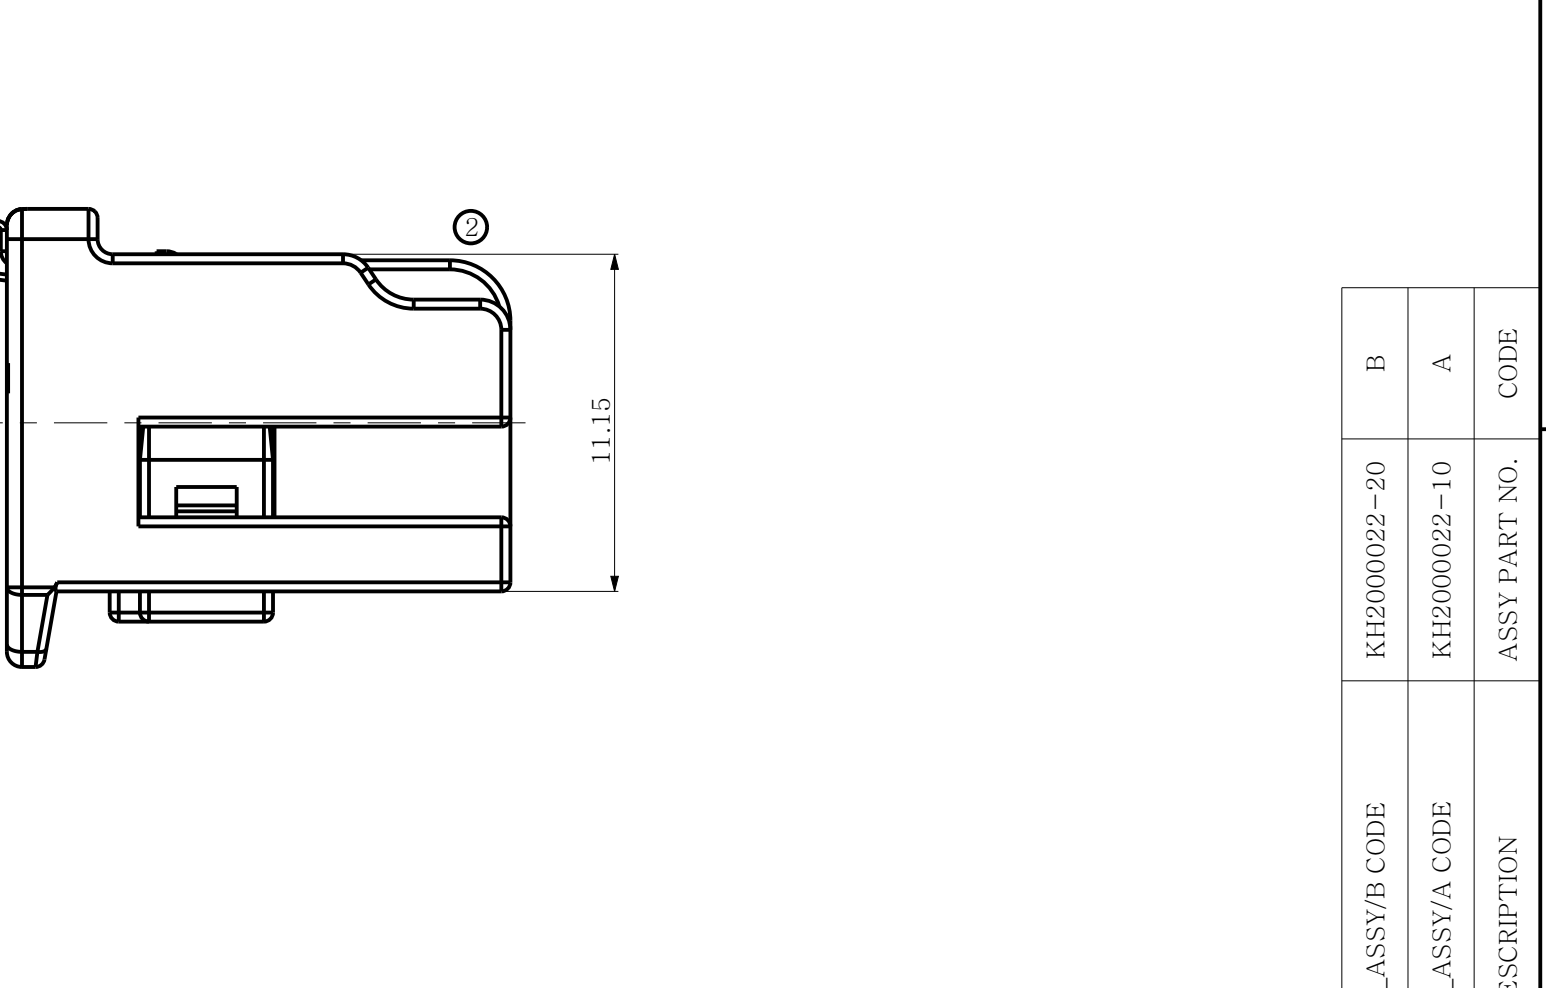
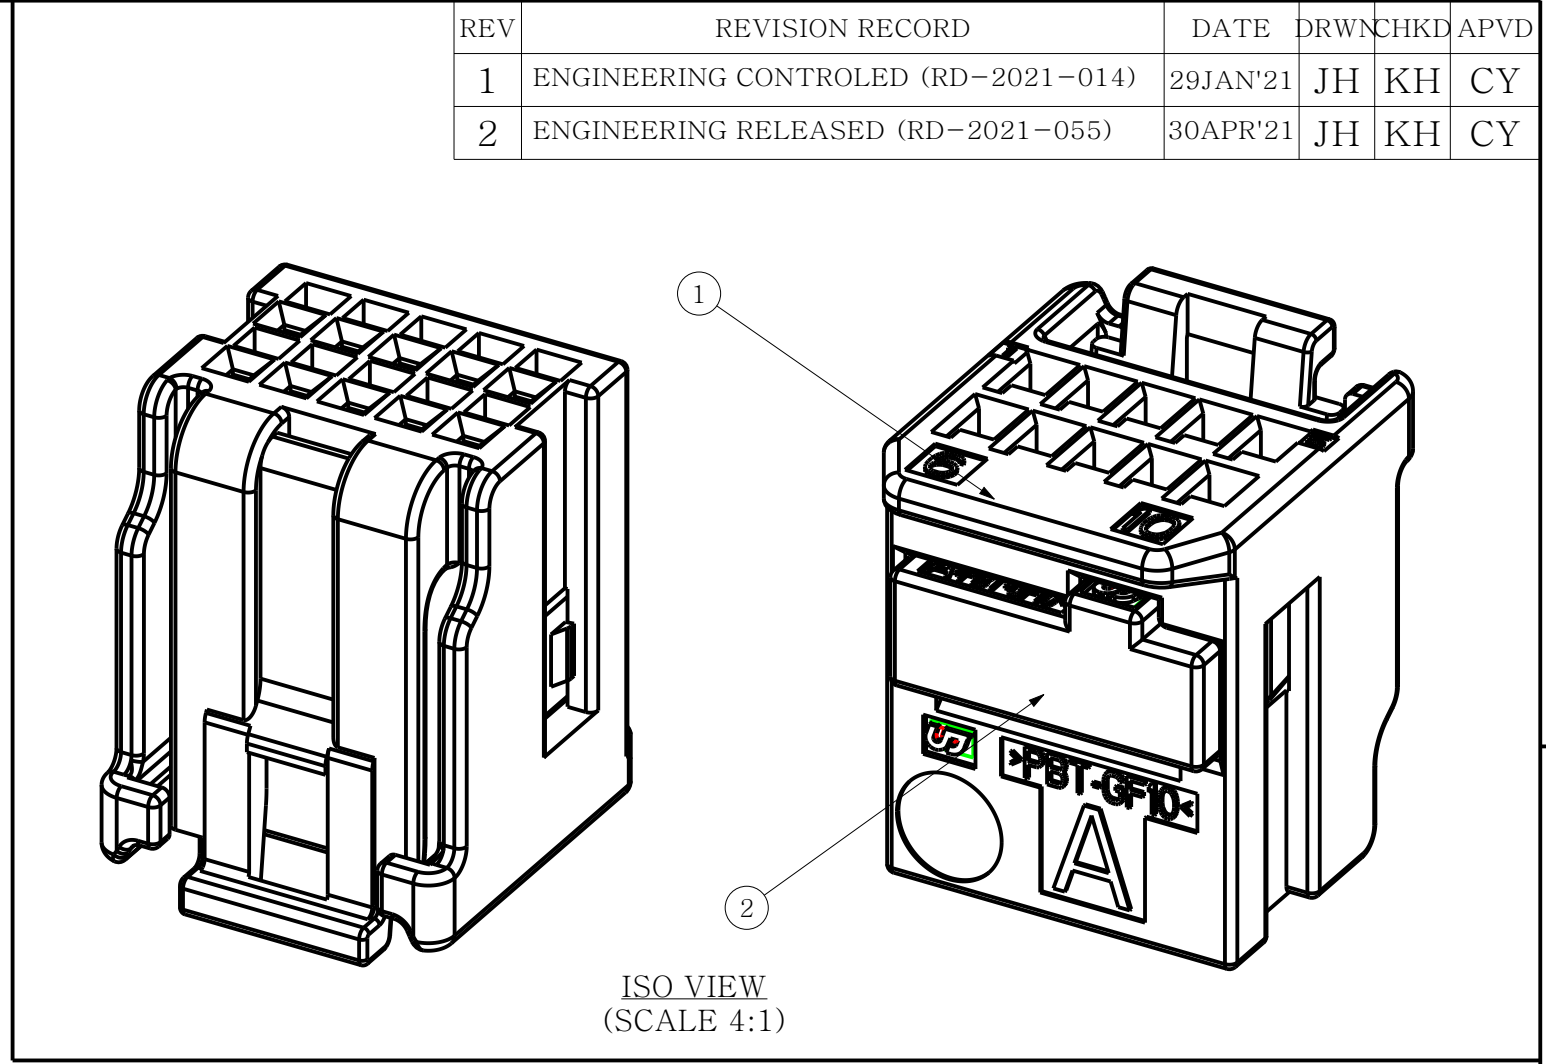


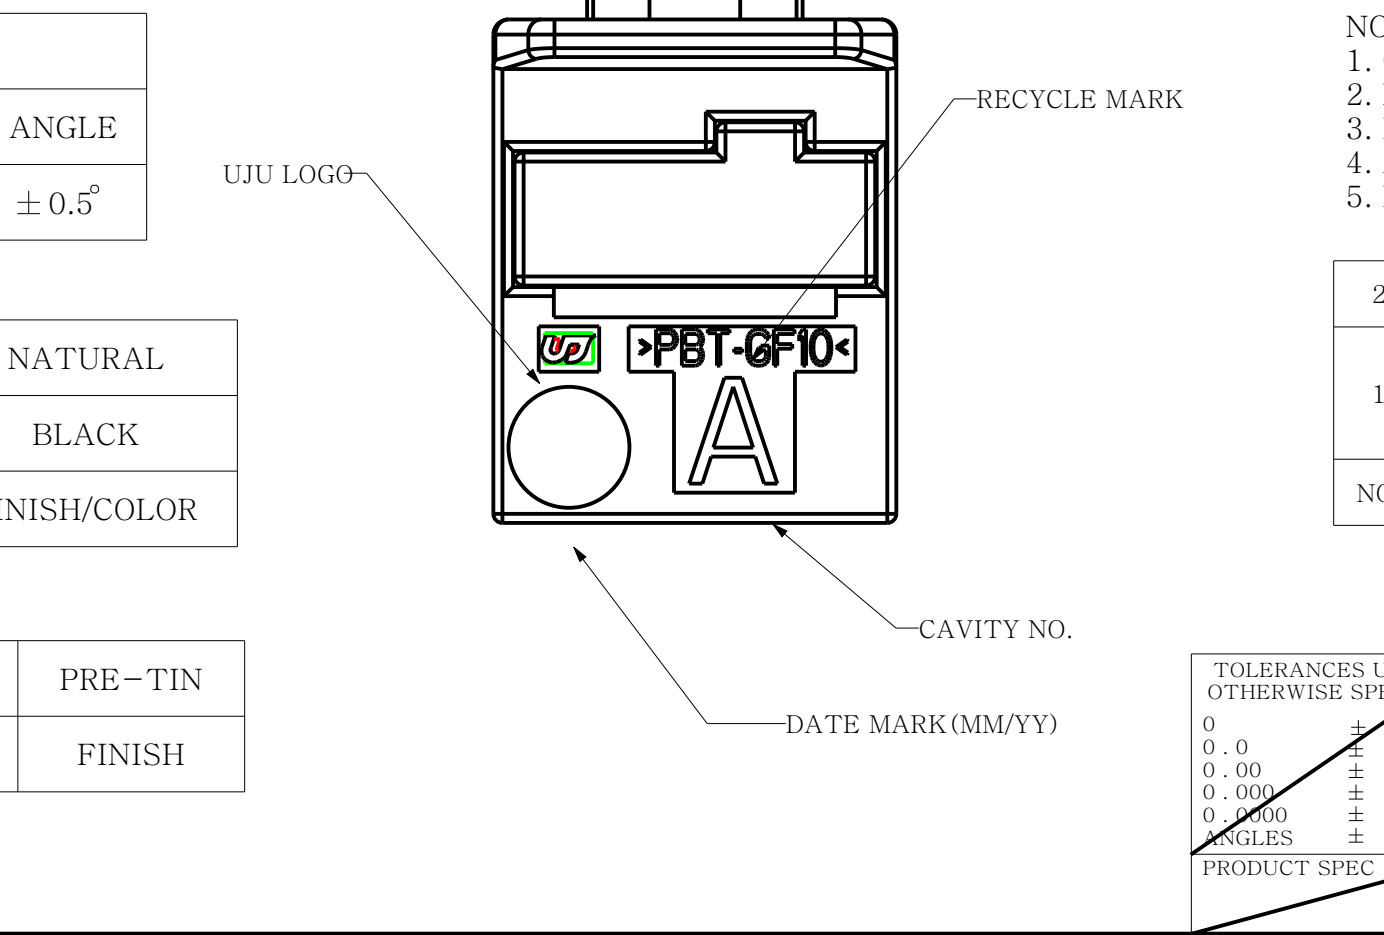

TOLERANCE								
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE
± 0.15	± 0.20	± 0.30	± 0.40	± 0.50	± 0.75	± 0.9	± 1.4	± 0.5°

TABLE-1				
025_IL_10F_ASSY	KH2000022-10	A	PBT-GF10	NATURAL
	KH2000022-20	B		BLACK
DESCRIPTION	PART NO.	CODE	MATERIAL	FINISH/COLOR

TABLE-2				
025_IL_FEMALE_TERMINAL(M)	KH2000016-21	0.3 ~ 0.5 SQ	COPPER ALLOY	PRE-TIN
DESCRIPTION	PART NO.	WIRE RANGE	MATERIAL	FINISH

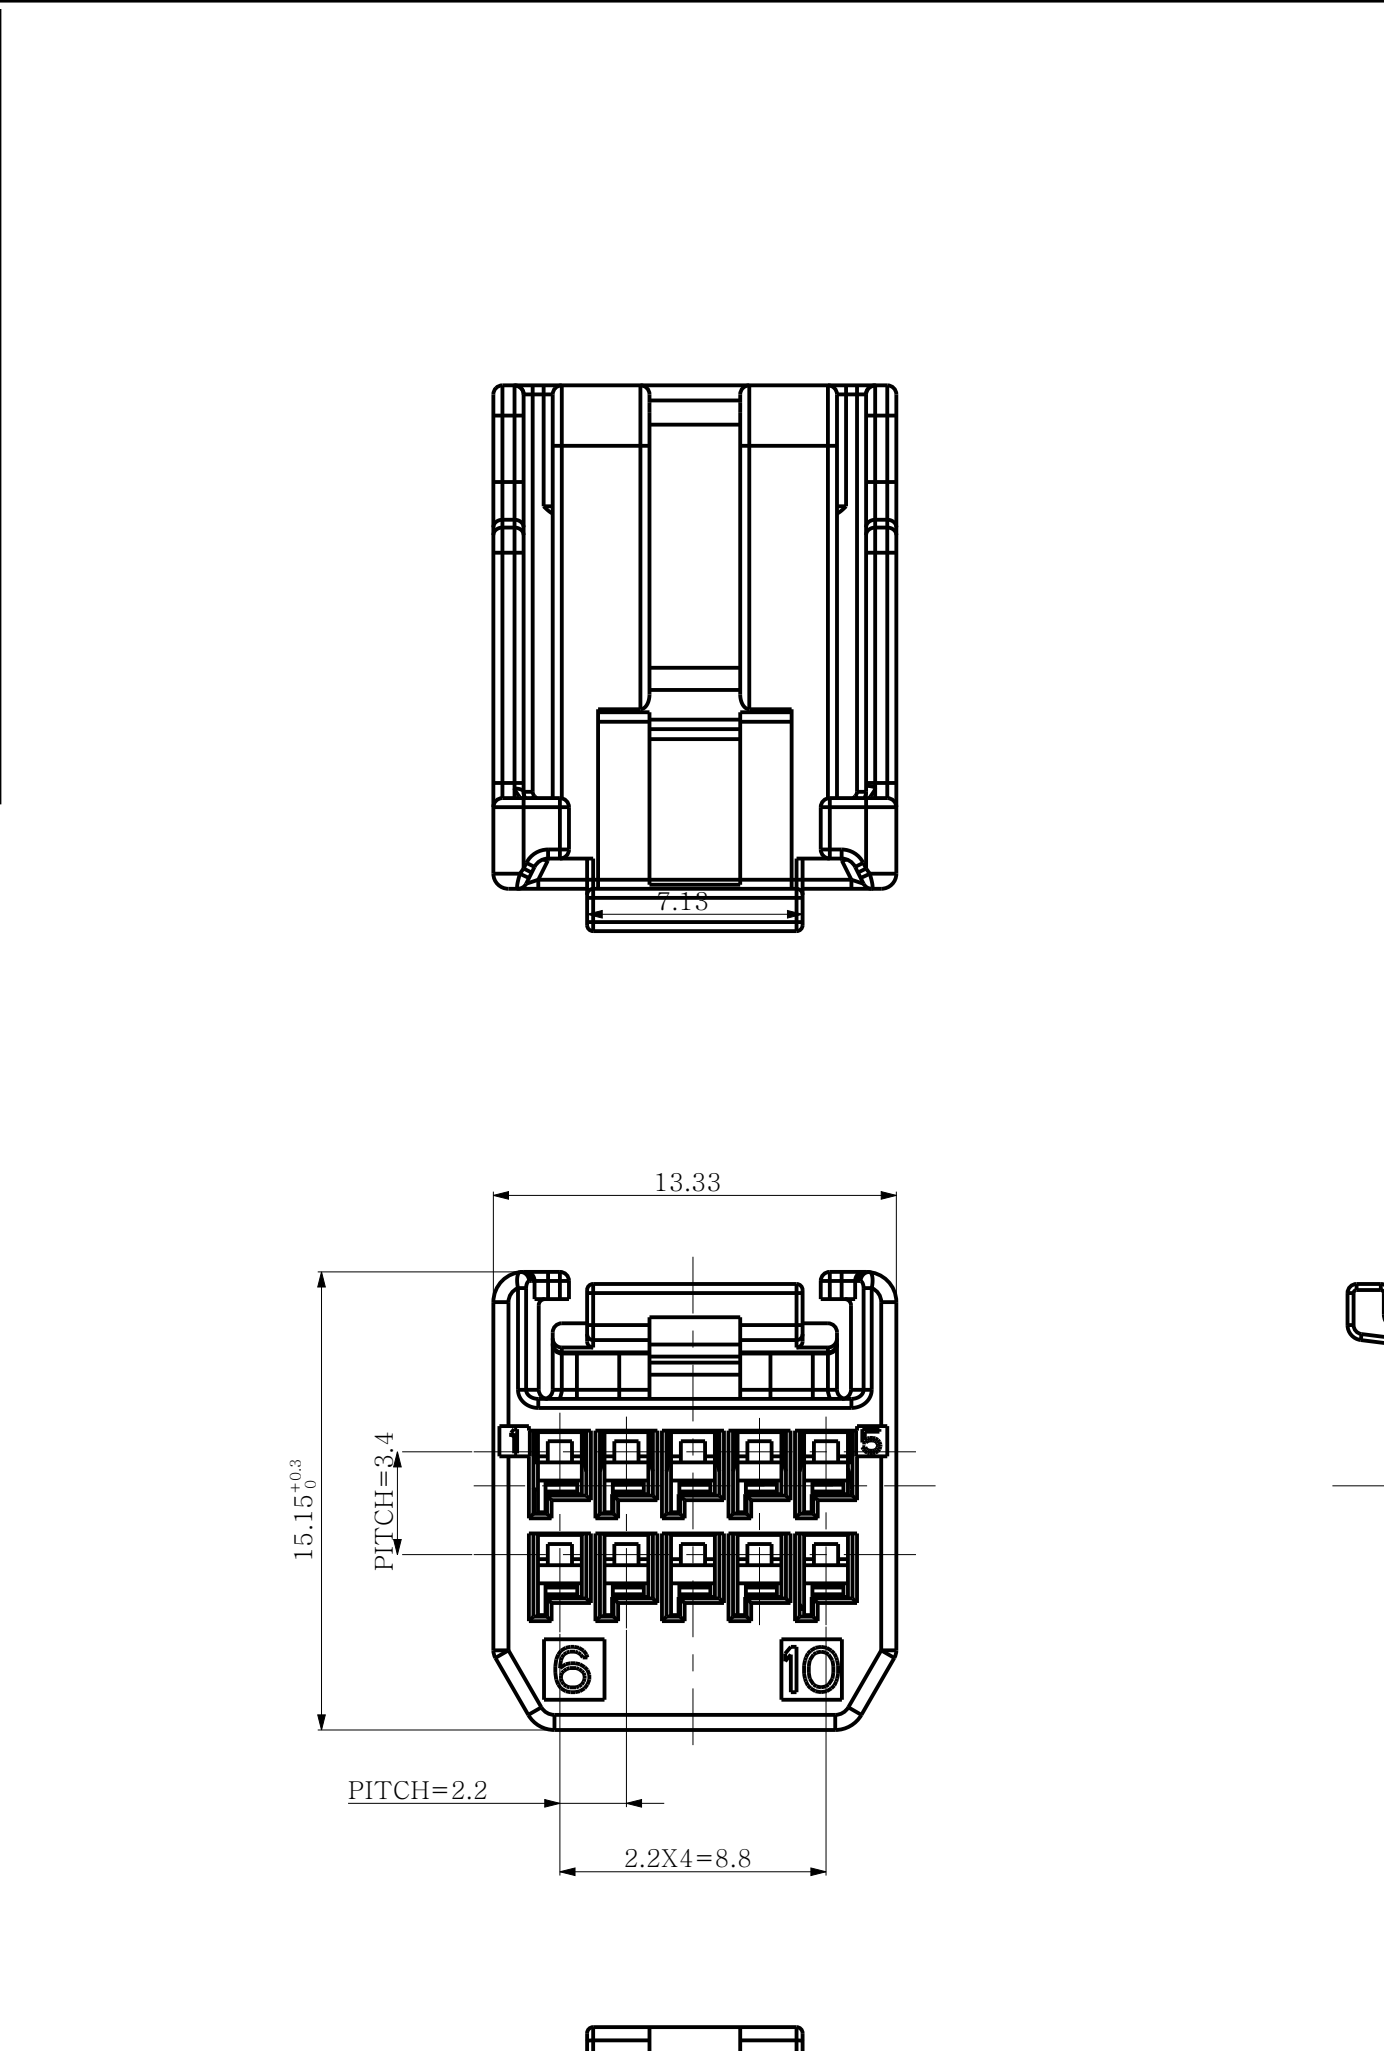

NOTE

GENERAL TOLERANCE : SEE TABLE TOLERANCE

DELIVERY CONDITION : TPA FIRST LOCK POSITION

HSG DESCRIPTION : SEE TABLE-1

APPLICABLE RECEPTACLE TERMINAL : TABLE-2


REFERENCE MATING CONNECTOR IS KH2000025

025_IL_10F

025_IL_10F

ASSY DETAIL

2	025_IL_10F_TPA	KM2000024-70	-	PBT-GF10	GREEN	1	1
1	025_IL_10F_HSG	KM2000023-20	B	PBT-GF10	BLACK	1	-
		KM2000023-10	A		NATURAL	-	1
NO.	DESCRIPTION	PART NO.	CODE	MATERIAL	FINISH/COLOR	Q'TY	Q'TY

UNLESS OTHERWISE SPECIFIED	UNIT MM	DRWN	JH.RYU	 (주)우주 일렉트로닉스 UJU Electronics co.,Ltd.			
		CHKD	KH.PARK				
		APVD	CY.CHOI				
	THIRD ANGLE PROJECTION	MATERIAL	NAME				
		SEE TABLE-1	025_IL_10F_ASSY				
	FINISH/COLOR	CUSTOMER	DRAWING NO				
	SEE TABLE-1	DRAWING	KH2000022				
APPLICATION SPEC	WEIGHT	LOC	RESTRICTED TO	SIZE	SCALE	SHEET	REV
				A2	4:1	1 OF 1	2