
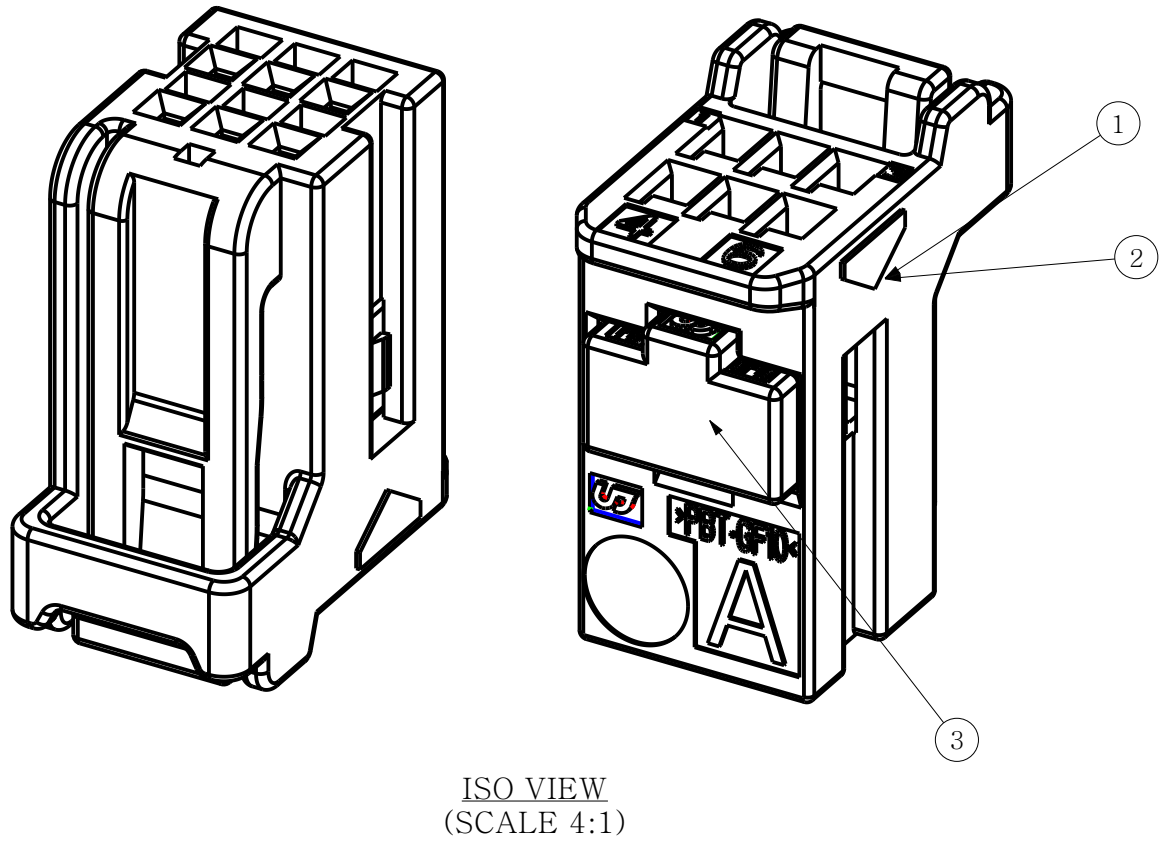
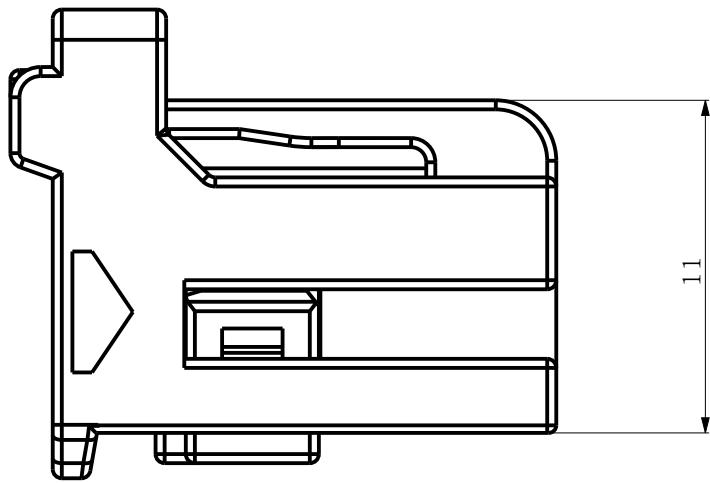
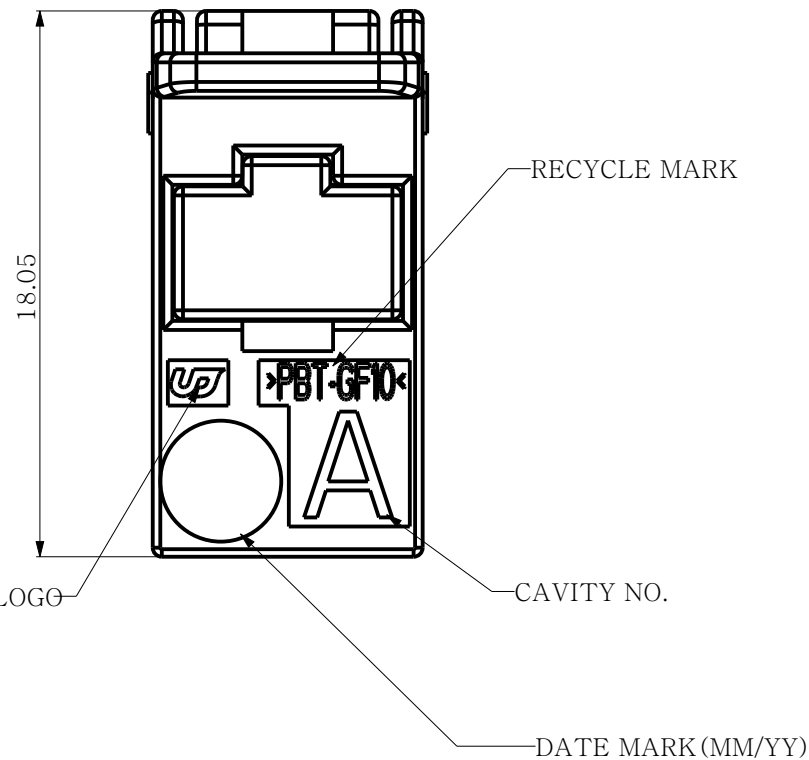
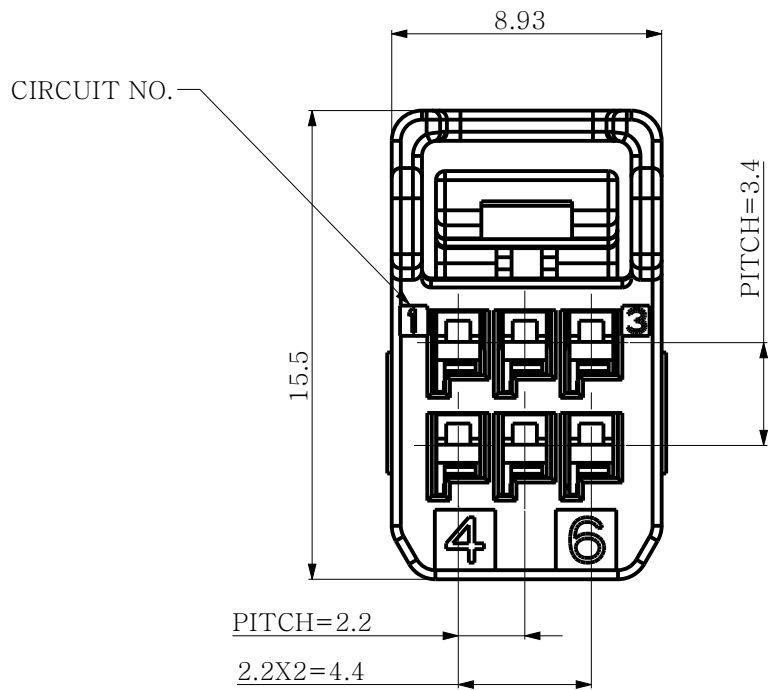
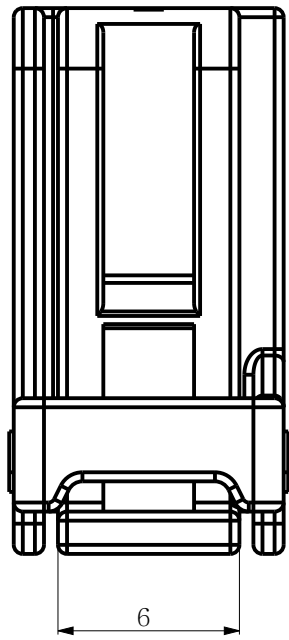
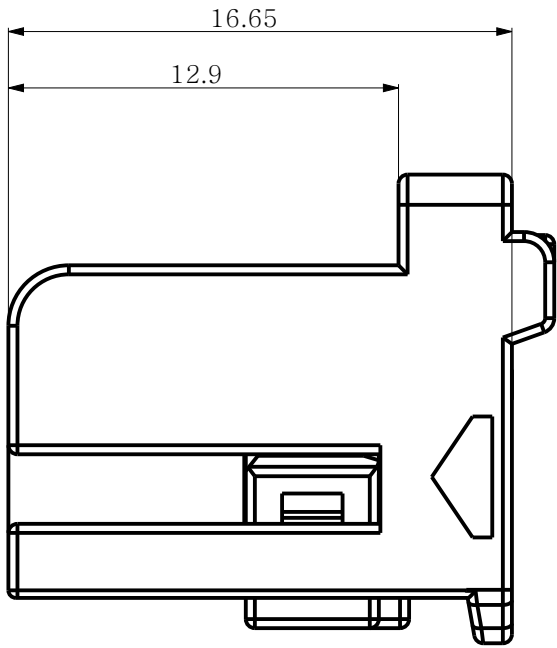


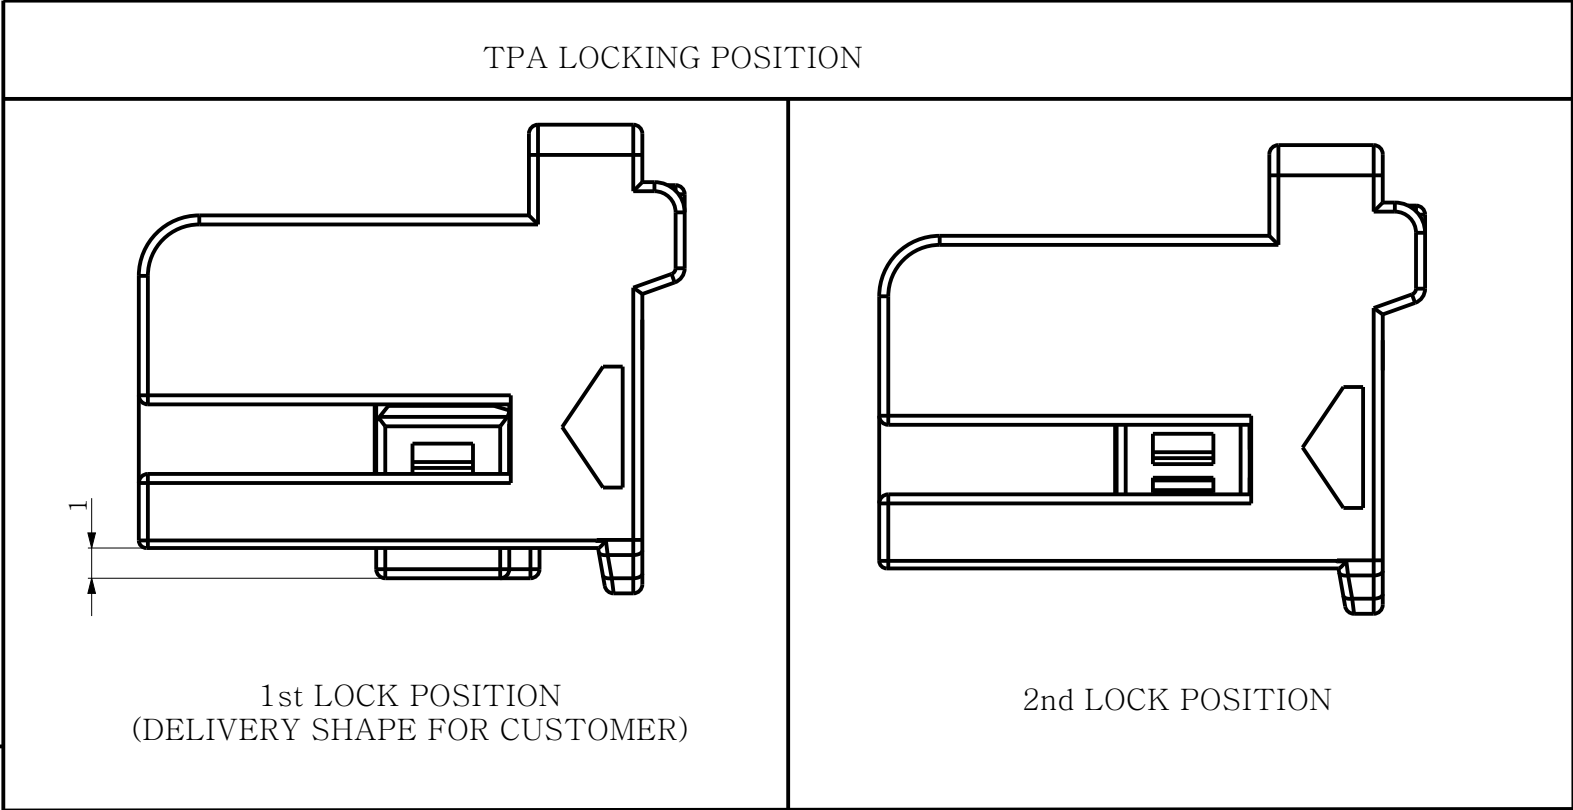

TOLERANCE								
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE
± 0.15	± 0.20	± 0.30	± 0.40	± 0.50	± 0.75	± 0.9	± 1.4	± 0.5°

TABLE-1				
025_II_6F_ASSY (BK)	KH2000059-20	-	PBT GF10	BLACK
025_II_6F_ASSY (NA)	KH2000059-10	-	PBT GF10	NATURAL
DESCRIPTION	PART NO.	CODE	MATERIAL	FINISH/COLOR

TABLE-2				
025_II_FEMALE_TERMINAL(S)	KH2000016-20	0.22 SQ	COPPER ALLOY	PRE-TIN
025_II_FEMALE_TERMINAL(M)	KH2000016-21	0.3 ~ 0.5 SQ	COPPER ALLOY	PRE-TIN
DESCRIPTION	PART NO.	WIRE RANGE	MATERIAL	FINISH

- NOTE
1. GENERAL TOLERANCE : SEE TABLE TOLERANCE
 2. DELIVERY CONDITION : TPA FIRST LOCK POSITION
 3. HSG DESCRIPTION : SEE TABLE-1
 4. APPLICABLE RECEPTACLE TERMINAL : TABLE-2
 - ② 5. REFERENCE MATING CONNECTOR IS KH2000065 , KH2100046

3	025_II_6F_TPA	KM2000061-30	-	PBT-GF10	GREEN	1	1
2	025_II_6F_HSG (BK)	KM2000060-20	-	PBT-GF10	BLACK	1	-
② 1	025_II_6F_HSG (NA)	KM2000060-10	-	PBT-GF10	NATURAL	-	1
NO.	DESCRIPTION	PART NO.	CODE	MATERIAL	FINISH/COLOR	Q'TY	Q'TY

TOLERANCES UNLESS OTHERWISE SPECIFIED 0 ± 0.0 ± 0.00 ± 0.000 ± 0.0000 ± ANGLES ±		UNIT MM		DRWN JH.RYU		 (주)우주 일렉트로닉스 UJU Electronics co.,Ltd.											
		THIRD ANGLE PROJECTION		CHKD KH.PARK													
		PRODUCT SPEC		APPLICATION SPEC		APVD CY.CHOI		NAME 025_II_6F_ASSY									
MATERIAL SEE TABLE-1						CUSTOMER DRAWING NO KH2000059											
FINISH/COLOR SEE TABLE-1																	
				WEIGHT		LOC		RESTRICTED TO		SIZE A2		SCALE 4:1		SHEET 1 OF 1		REV 2	

REV	REVISION RECORD	DATE	DRWN	CHKD	APVD
1	ENGINEERING CONTROLLED	01DEC'20	JH	KH	CY
2	RD-2021-095	25JUN'21	JH	KH	CY